
BC 250 12/24V

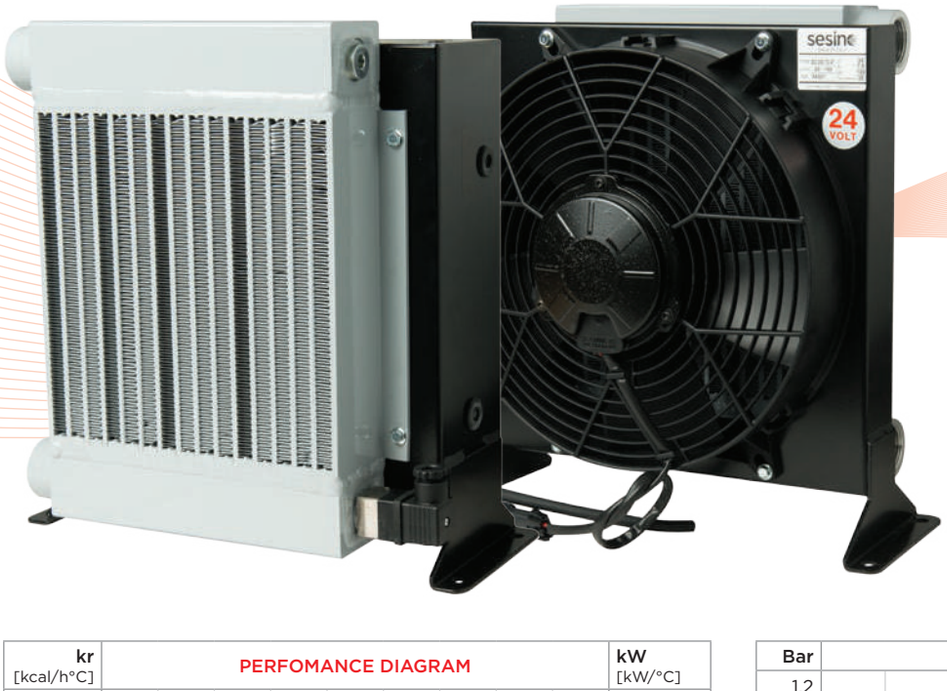

PURCHASE CODES

BC 250 12/24V without thermo switch	3RBC25012 3RBC25024
BC 250 12/24V with thermo switch	3RBC25012T247 3RBC25024T247 3RC25012T260 3RBC25024T260

SPARE PARTS

Cooling element	1RO03379
Frame	3CNL300.1
Electric fan 12V	1VNAPL30012C
Electric fan 24V	1VNAPL30024C
Thermo-switch 47-36 12V IP 67	1TRM 47-36/12V
Thermo-switch 47-36 24V IP 67	1TRM 47-36/24V
Thermo-switch 60-49 12V IP 67	1TRM 60-49/12V
Thermo-switch 60-49 24V IP 67	1TRM 60-49/24V

PERFOMANCE DIAGRAM

kr [kcal/h°C]	kW [kW/°C]
180	
170	0,20
160	0,19
150	0,18
140	0,17
130	0,16
120	0,15
110/0	0,14

10 20 30 40 50 60 70 80 90 l/min


PRESSURE DROP DIAGRAM

Bar
1,2
1
0,8
0,6
0,4
0,2
0


10 20 30 40 50 60 70 80 90 l/min

CORRECTION FACTOR

cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

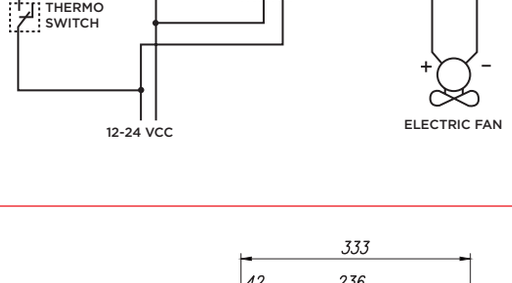

- Dimensions and technical characteristics are not binding

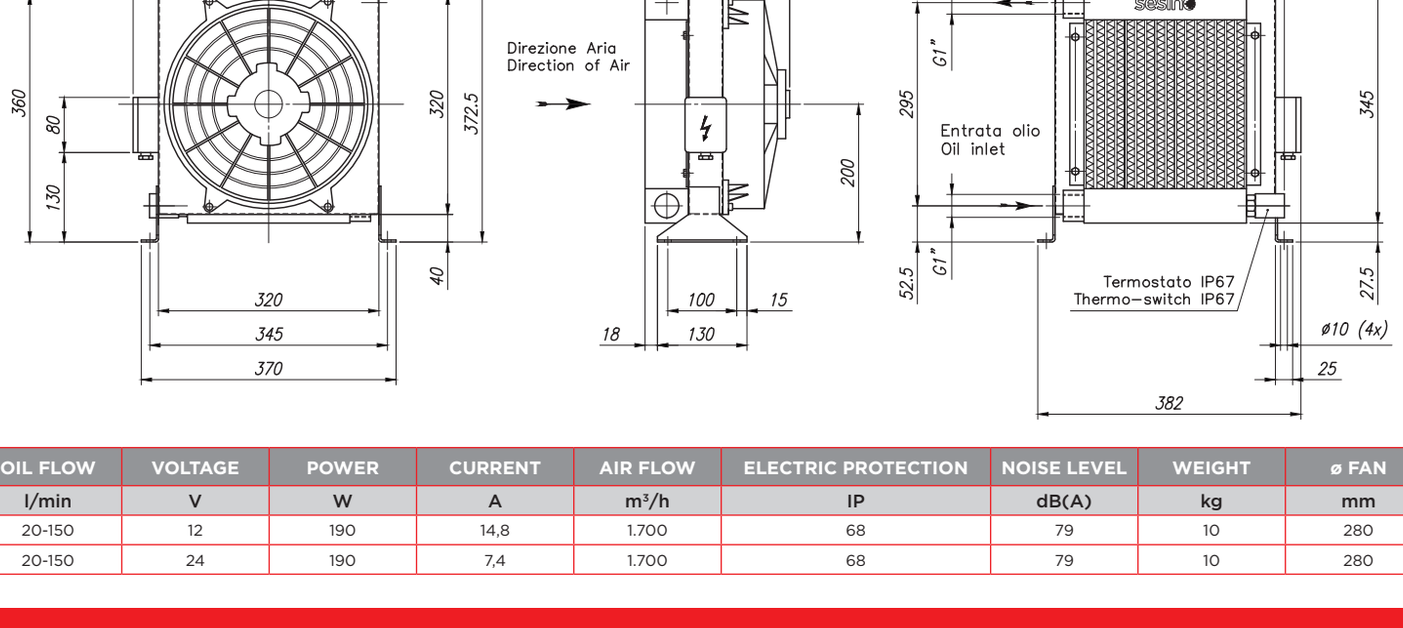

OIL FLOW	VOLTAGE	POWER	CURRENT	AIR FLOW	ELECTRIC PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	V	W	A	m³/h	IP	dB(A)	kg	mm
20-150	12	190	14,8	1.700	68	79	10	280
20-150	24	190	7,4	1.700	68	79	10	280

COSTANTE SESINO SPA: via Monza, 150 A/B 20060 GESSATE (MI)
info@sesino.com - www.sesino.com | tel. +39 02.95.38.03.34 - fax +39 02.95.78.05.28

BC 250/2 12/24V



PURCHASE CODES

BC 250/2 12/24V without thermo switch	3RBC250/212 3RBC250/224
BC 250/2 12/24V with thermo switch	3RBC250/212T247 3RBC250/224T247 3RBC250/212T260 3RBC250/224T260

SPARE PARTS

Cooling element	1RO03380
Frame	3CNL302.1
Electric fan 12V	1VNAPL30012C
Electric fan 24V	1VNAPL30024C
Thermo-switch 47-36 12V IP 67	1TRM 47-36/12V
Thermo-switch 47-36 24V IP 67	1TRM 47-36/24V
Thermo-switch 60-49 12V IP 67	1TRM 60-49/12V
Thermo-switch 60-49 24V IP 67	1TRM 60-49/24V

PERFOMANCE DIAGRAM

kr [kcal/h°C]	kW [kW/°C]
230	0,26
220	0,25
210	0,24
200	0,23
190	0,22
180	0,21
170	0,2

160/0 20 40 60 80 100 120 140 160 180 l/min


PRESSURE DROP DIAGRAM

Bar
0,9
0,75
0,6
0,45
0,3
0,15
0


0 20 40 60 80 100 120 140 160 180 l/min

CORRECTION FACTOR

cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

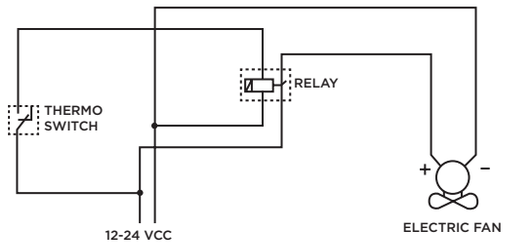

- Dimensions and technical characteristics are not binding

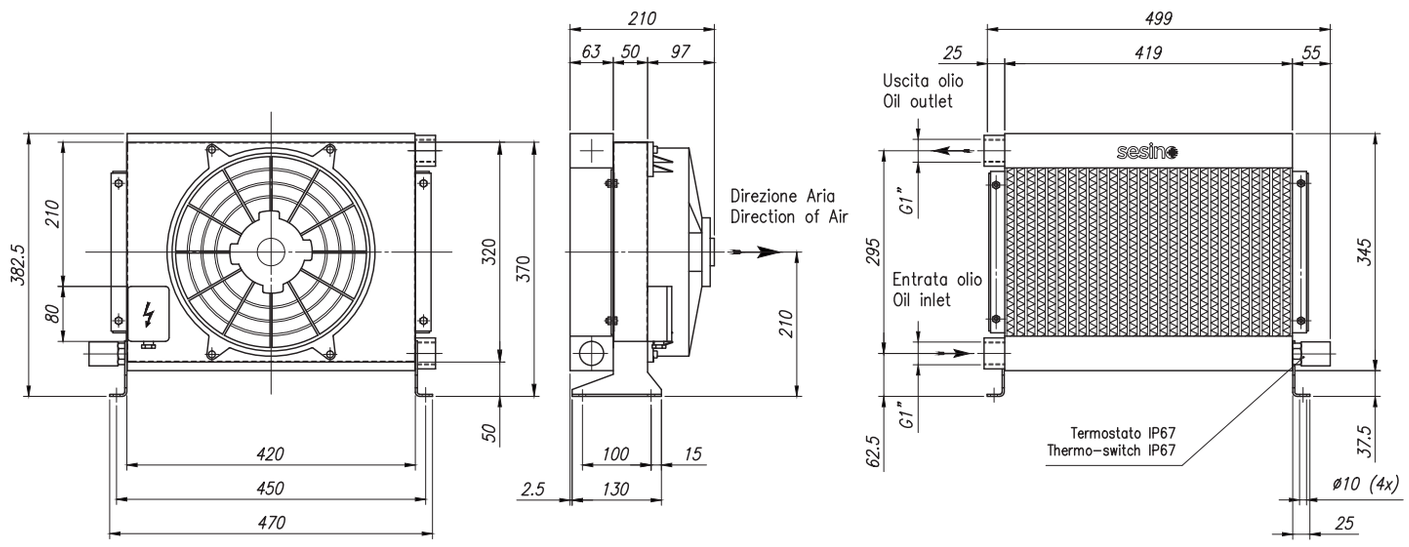


OIL FLOW	VOLTAGE	POWER	CURRENT	AIR FLOW	ELECTRIC PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	V	W	A	m^3/h	IP	dB(A)	kg	mm
30-180	12	180	15,0	2.200	68	83	14	280
30-180	24	180	7,5	2.200	68	83	14	280

sesino

COSTANTE SESINO SPA: via Monza, 150 A/B 20060 GESSATE (MI)
info@sesino.com - www.sesino.com | tel. +39 02.95.38.03.34 - fax +39 02.95.78.05.28

BC 250 AC

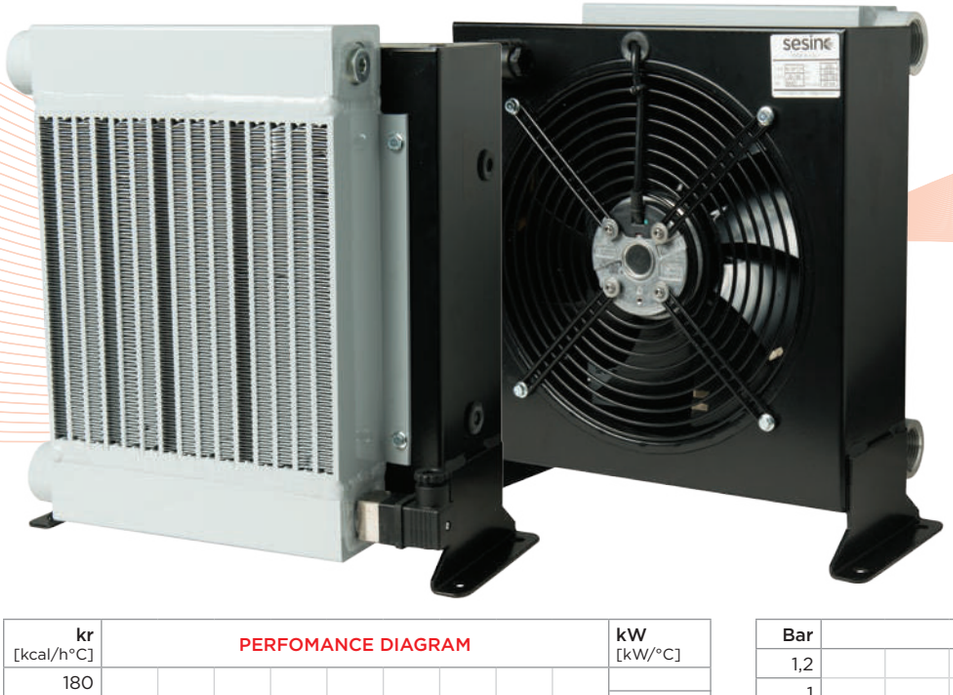

PURCHASE CODES

BC 250 single phase without thermo switch	3RBC250
BC 250 single phase with thermo switch	3RBC250T247 3RBC250T260
BC 250 three phase without thermo switch	3RBC25038
BC 250 three phase with thermo switch	3RBC25038T247 3RBC25038T260

SPARE PARTS

Cooling element	1RO03379
Frame	3CNBC250M/T.1
Electric fan for BC 250 single phase	1VNA2E250G
Electric fan for BC 250 three phase	1VNA2D250.2
Thermo-switch 47-36 IP 65	1TRM 47-36
Thermo-switch 60-49 IP 65	1TRM 60-49

PERFOMANCE DIAGRAM

kr [kcal/h°C]	kW [kW/°C]
180	
170	0,20
160	0,19
150	0,18
140	0,17
130	0,16
120	0,15
110/0	0,14

10 20 30 40 50 60 70 80 90 l/min


PRESSURE DROP DIAGRAM


Bar
1,2
1
0,8
0,6
0,4
0,2
0

10 20 30 40 50 60 70 80 90 l/min


CORRECTION FACTOR

cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

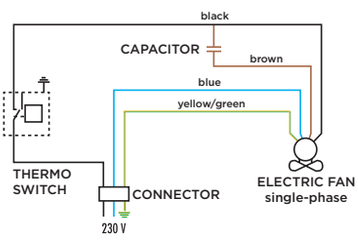

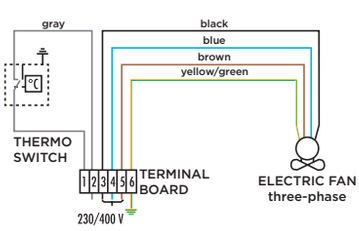

- Dimensions and technical characteristics are not binding

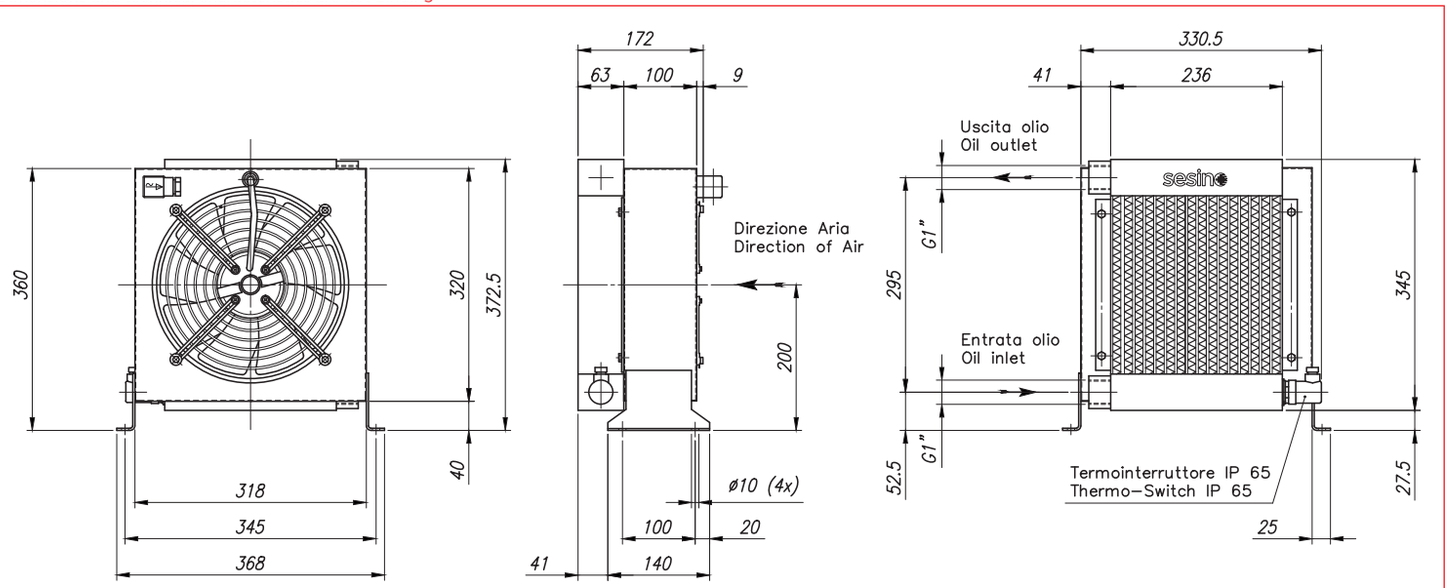

OIL FLOW	VOLTAGE	FREQUENCY	POWER	CURRENT	AIR FLOW	PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	V	hz	W	A	m³/h	IP	dB(A)	kg	mm
10-80	230	50/60	115/150	0,51/0,66	910	54	74	13	250
10-80	400	50/60	100/140	0,20/0,23	950	54	73	13	250

sesino

COSTANTE SESINO SPA: via Monza, 150 A/B 20060 GESSATE (MI)
info@sesino.com - www.sesino.com | tel. +39 02.95.38.03.34 - fax +39 02.95.78.05.28

BC 250/2 AC





PURCHASE CODES

BC 250/2 single phase without thermo switch	3RBC250/2
BC 250/2 single phase with thermo switch	3RBC250/2T247 3RBC250/2T260
BC 250/2 three phase without thermo switch	3RBC250/238
BC 250/2 three phase with thermo switch	3RBC250/238T247 3RBC250/238T260


SPARE PARTS

Cooling element	1RO03380
Frame	3CNBC250/2M/T.1
Electric fan for BC 250/2 single phase	1VNA2E250G
Electric fan for BC 250/2 three phase	1VNA2D250.2
Thermo-switch 47-36 IP 65	1TRM 47-36
Thermo-switch 60-49 IP 65	1TRM 60-49

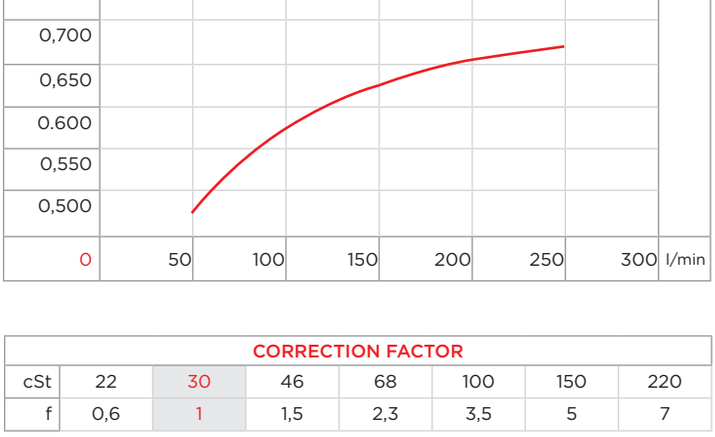


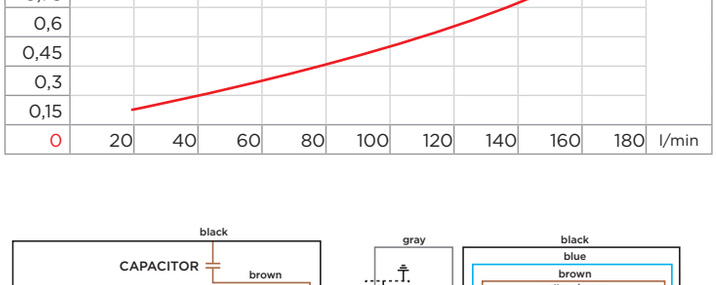

CORRECTION FACTOR							
cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

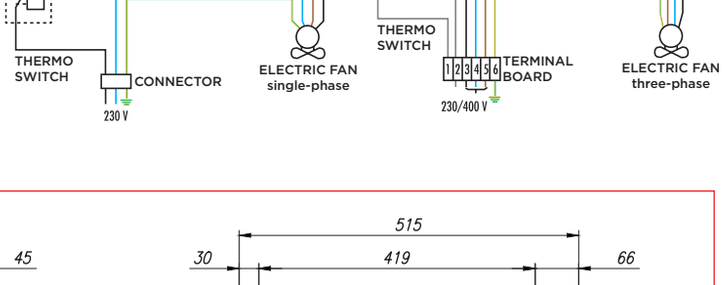

- Dimensions and technical characteristics are not binding

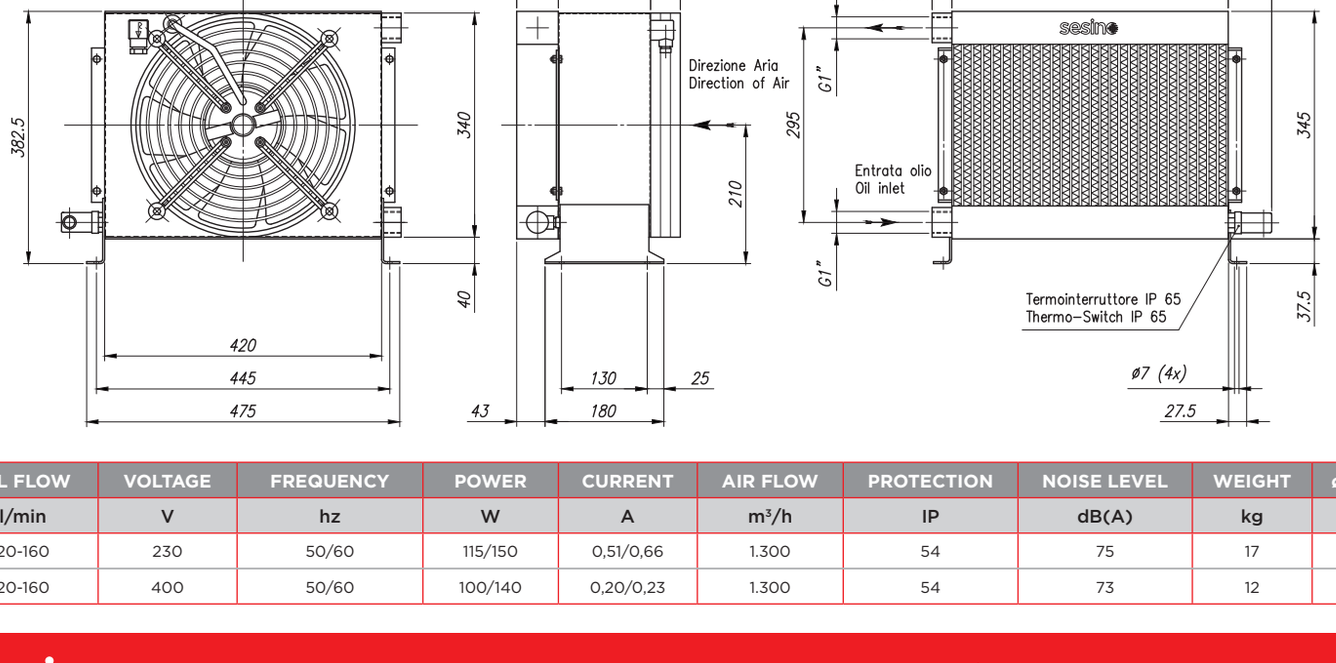

OIL FLOW	VOLTAGE	FREQUENCY	POWER	CURRENT	AIR FLOW	PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	V	hz	W	A	m³/h	IP	dB(A)	kg	mm
20-160	230	50/60	115/150	0,51/0,66	1.300	54	75	17	250
20-160	400	50/60	100/140	0,20/0,23	1.300	54	73	12	250

sesino

COSTANTE SESINO SPA: via Monza, 150 A/B 20060 GESSATE (MI)
info@sesino.com - www.sesino.com | tel. +39 02.95.38.03.34 - fax +39 02.95.78.05.28