

MB/25 MONOBLOCK VALVES

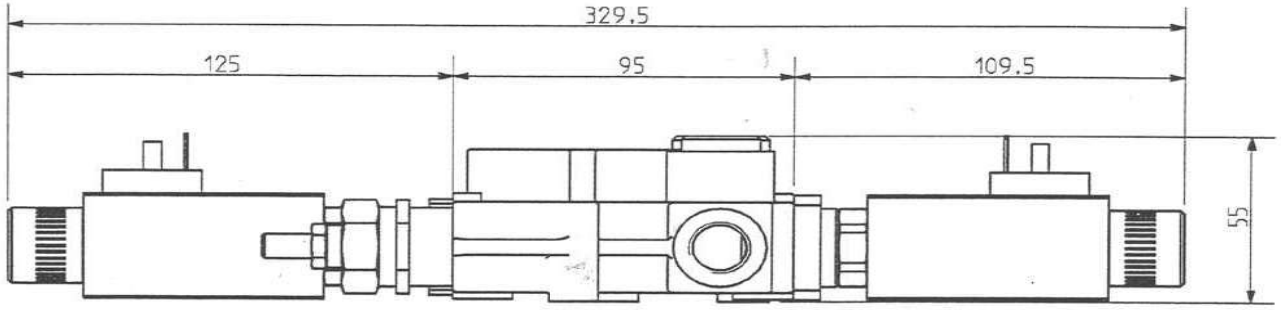

N° Sect	-A-
1	81
2	117
3	153
4	189
5	225
6	261

FIXING HOSE-A-

Ports	Thread	Option
P-A-B	3/8 BSP	1/2 BSP
T	1/2 BSP	

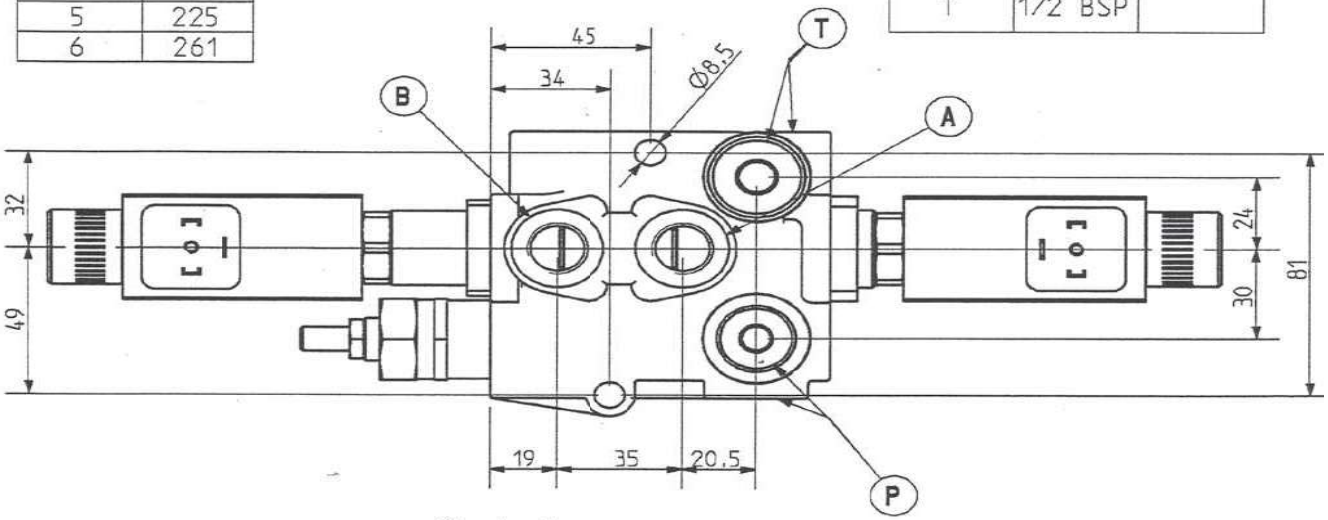

* Standard

Max Flow	Exc Press	Solenoids	Watts	Ampere	Connect
55	150	12 DC	40*	3.33	DIN 43650
45	180	24 DC	40*	1.66	DIN 43650
35	210		50	4.16	
25	250		50	2.08	

Queste prestazioni richiedono un filtraggio di 20 Micron o inferiore

For this performance it's needeed an filter cartridge 20 Micron or better

ELETRIC ON-OFF CONTROL

TYPE OF CIRCUITS AVAILABLE

AED	**DOUBLE ACTING**
EED	**SINGLE ACTING**
CED	**A e B in T**