
MB25/1 MONOBLOCK VALVES

MAX FLOW	45 LIT/MIN
MAX PRESSURE	350 BAR
BACK PRESSURE	180 BAR
LEAKAGE TO 100 BAR	1CC/MIN
WEIGHT	KG. 2,3
CONFIGURATION	PARALLEL


STANDARD CONFIGURATION



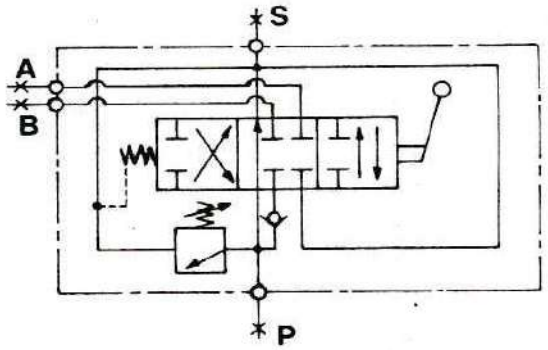


STANDARD THREADS BSP GAS


Attacco	Dimens.	Dimens Spec
P	3/8"	1/2"
P sup	3/8"	1/2"
A/B	3/8"	1/2"
T	1/2"	1/2"
T sup	1/2"	1/2"

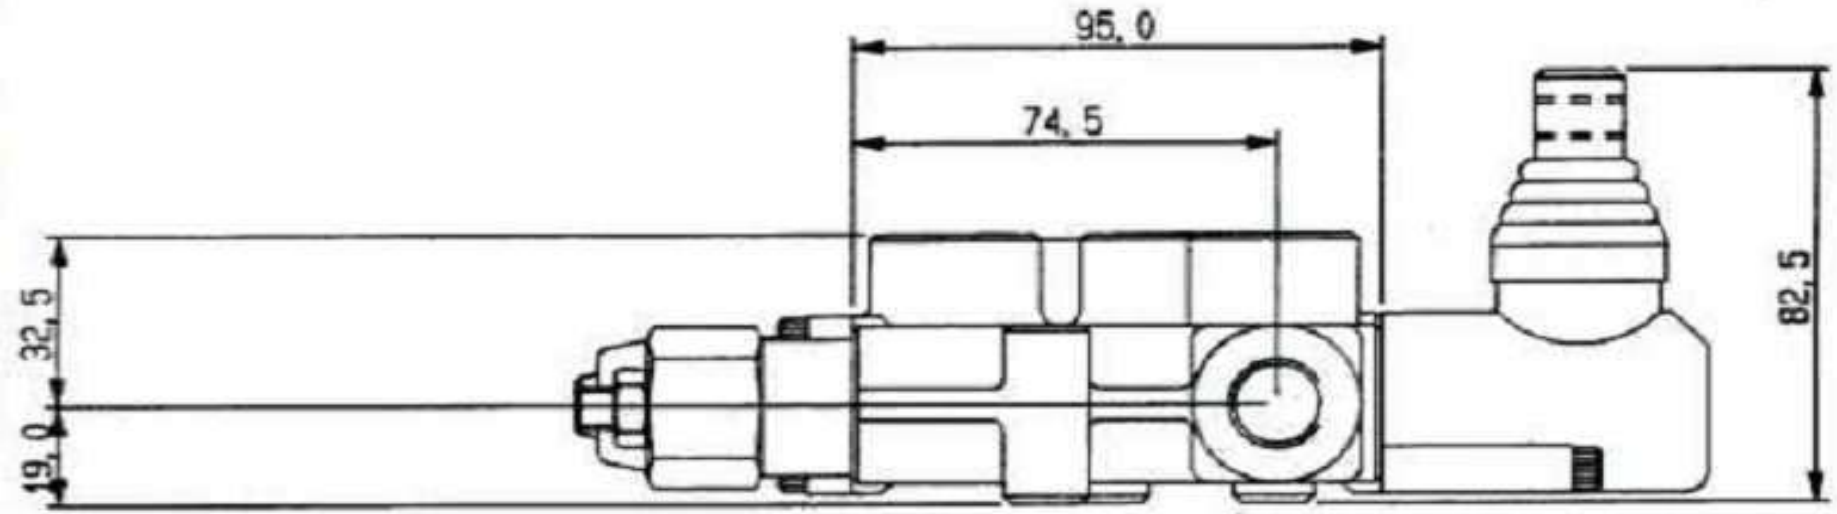

MB25/1 MONOBLOCK VALVES

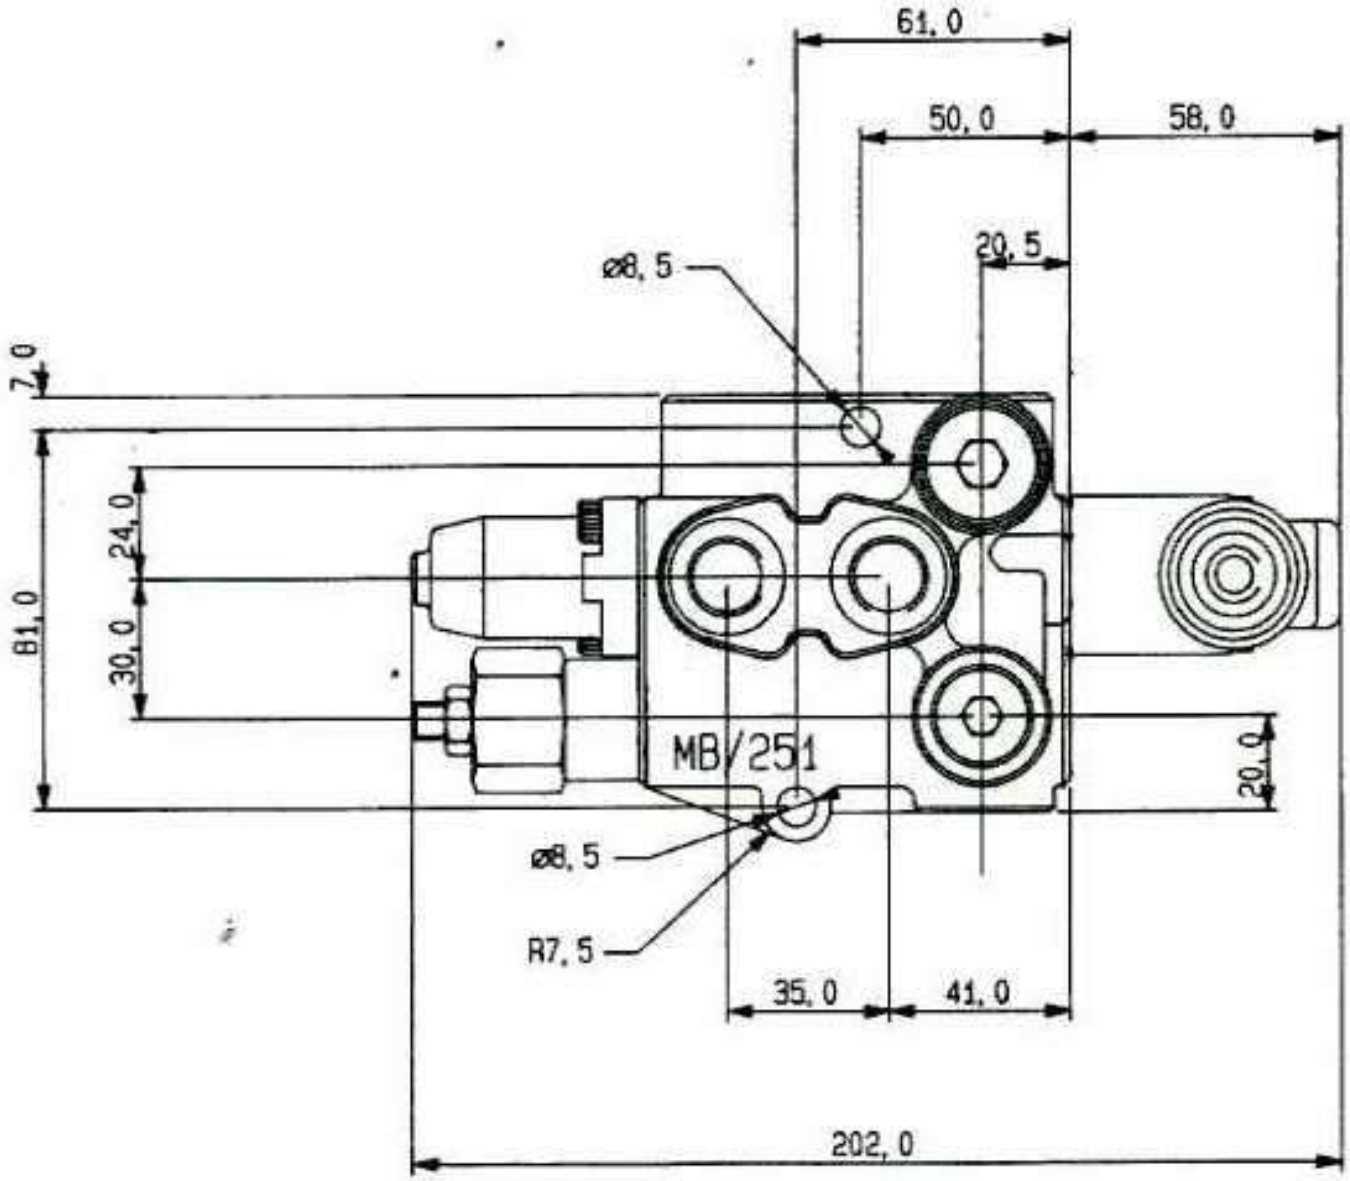


STANDARD LEVER MB/25

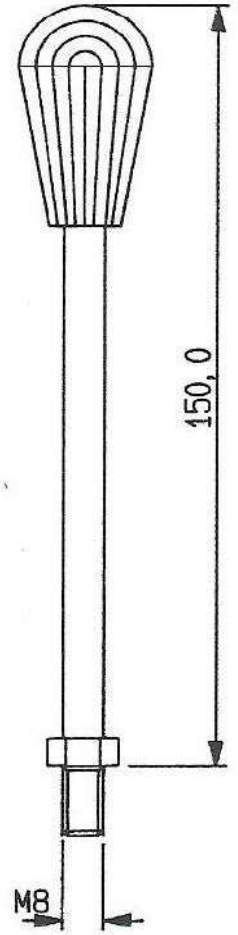

MB25/2 MONOBLOCK VALVES

MAX FLOW	45 LIT/MIN
MAX PRESSURE	350 BAR
BACK PRESSURE	180 BAR
LEAKAGE TO 100 BAR	1CC/MIN
WEIGHT	KG. 3,5
CONFIGURATION	PARALLEL


STANDARD CONFIGURATION

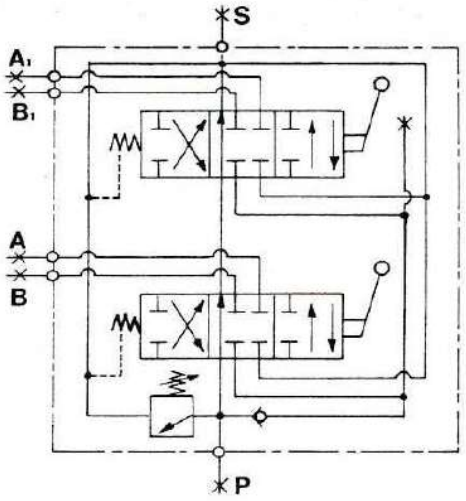




STANDARD THREADS BSP GAS

Attacco	Dimens.	Dimens Spec
P	3/8"	1/2"
P sup	3/8"	1/2"
A/B	3/8"	1/2"
T	1/2"	1/2"
T sup	1/2"	1/2"

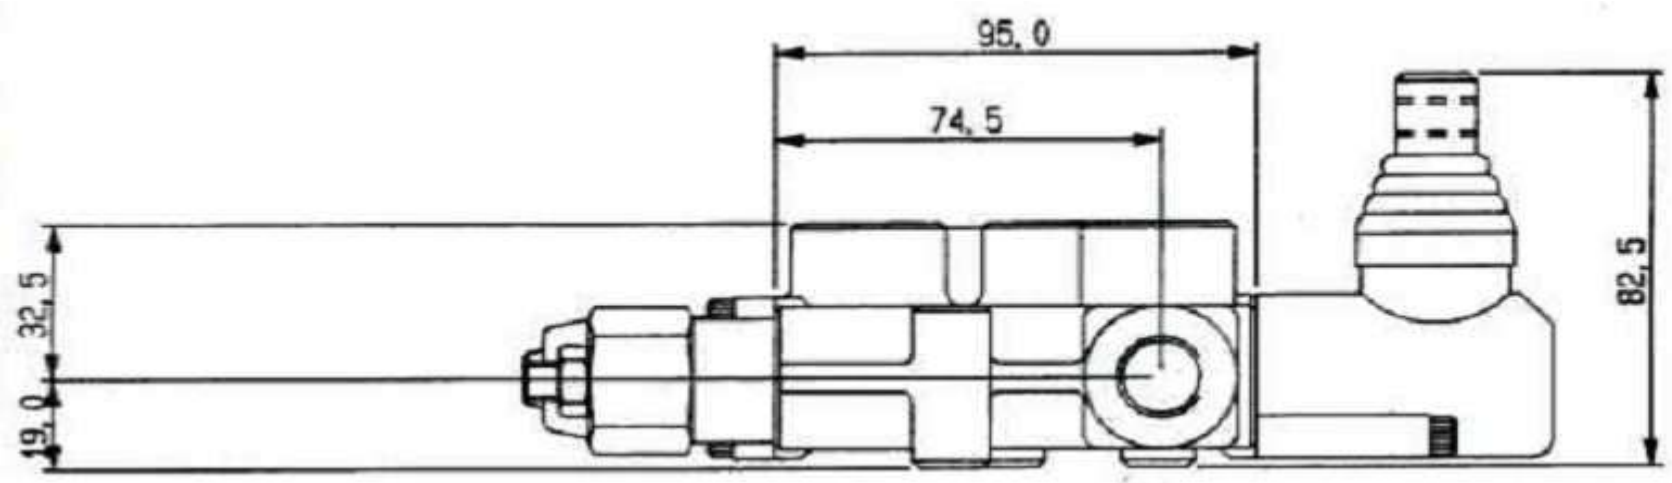

MB25/2 MONOBLOCK VALVES

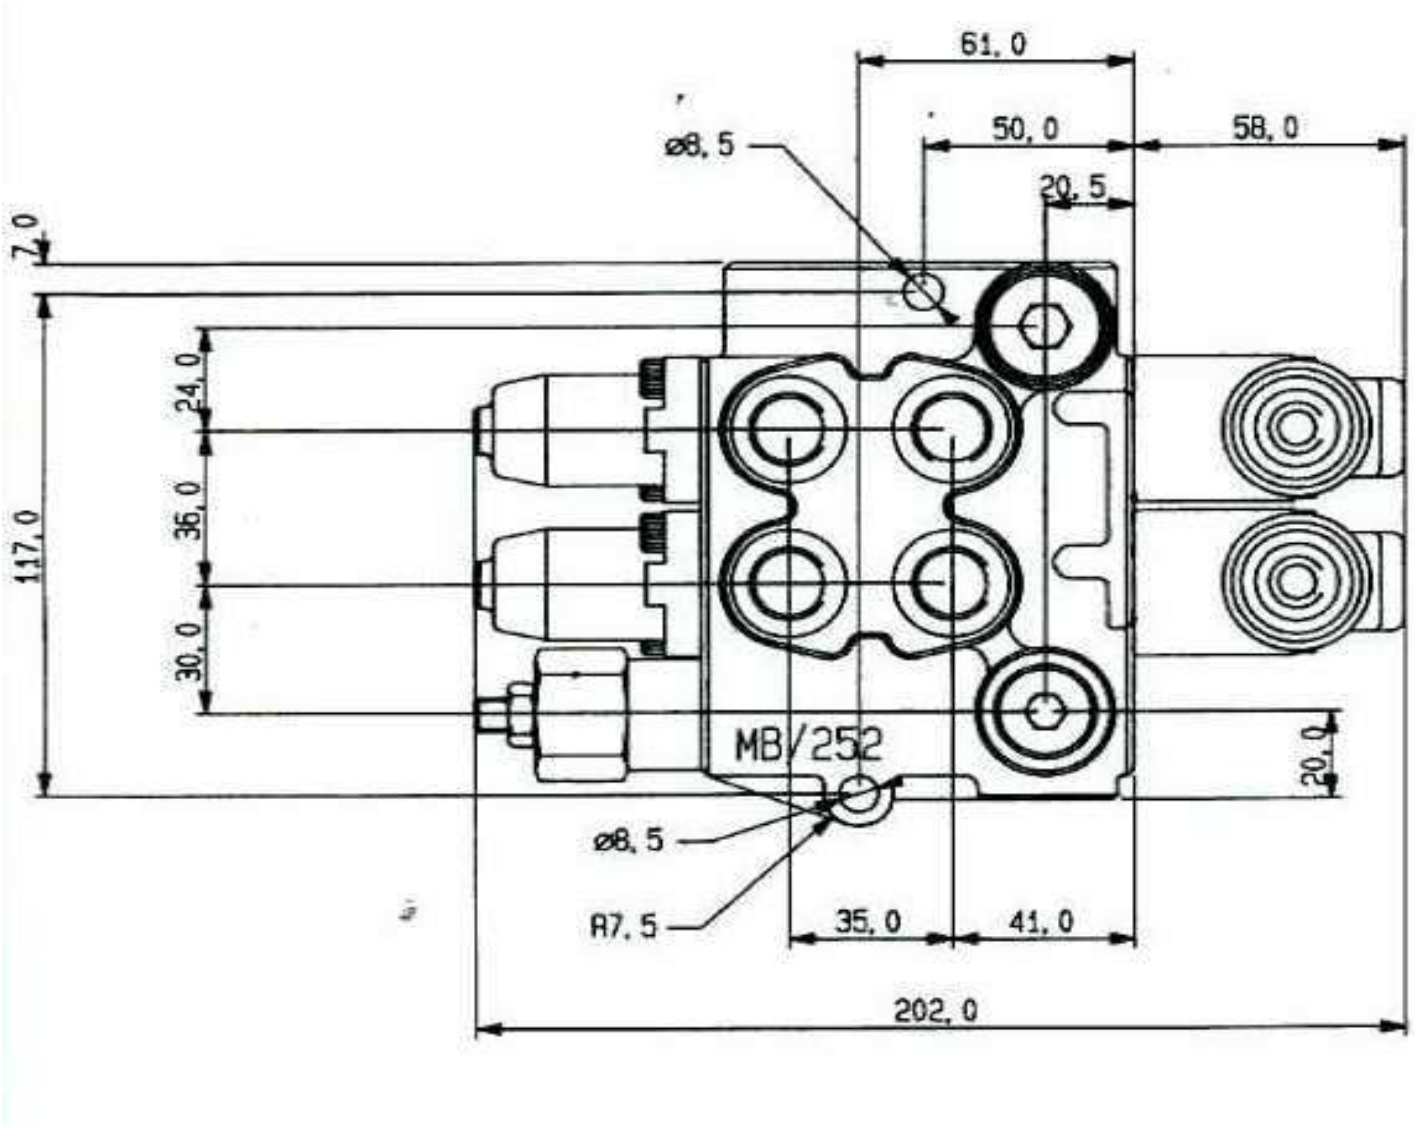




MB25/3 MONOBLOCK VALVES

MAX FLOW	45 LIT/MIN
MAX PRESSURE	350 BAR
BACK PRESSURE	180 BAR
LEAKAGE	1CC/MIN
WEIGHT	KG. 4,7
CONFIGURATION	PARALLEL


STANDARD CONFIGURATION

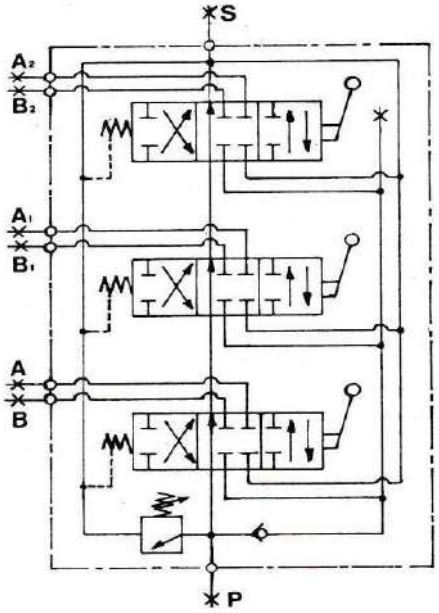




STANDARD THREADS BSP GAS

Attacco	Dimens.	Dimens Spec
P	3/8"	1/2"
P sup	3/8"	1/2"
A/B	3/8"	1/2"
T	1/2"	1/2"
T sup	1/2"	1/2"

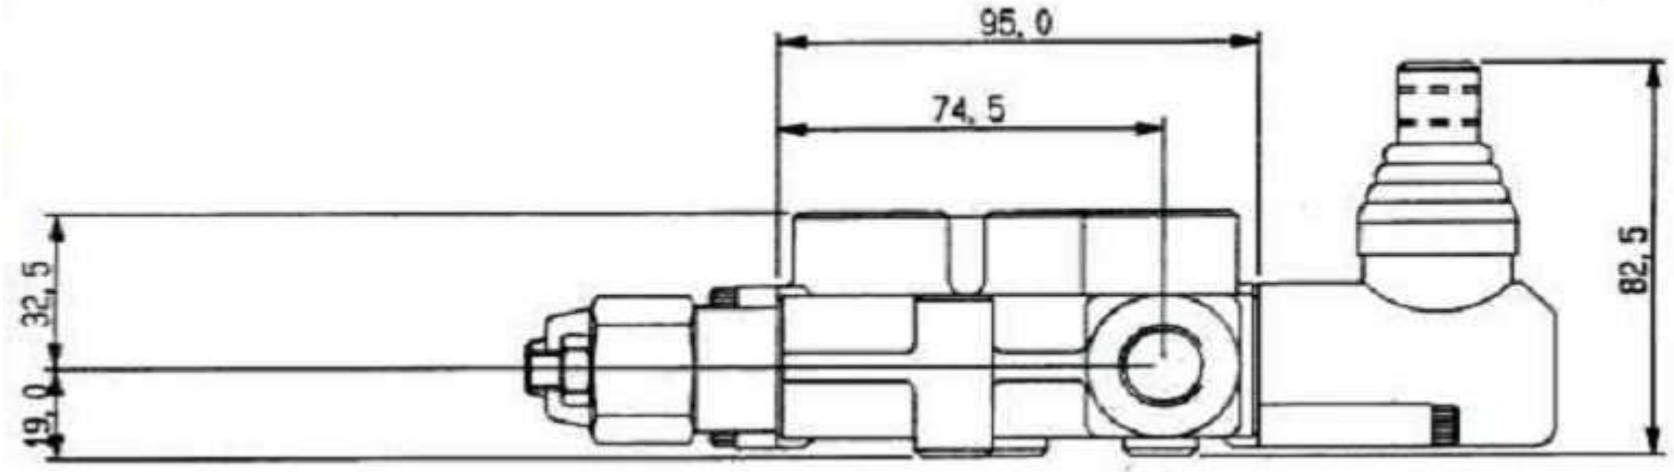

MB25/3 MONOBLOCK VALVES

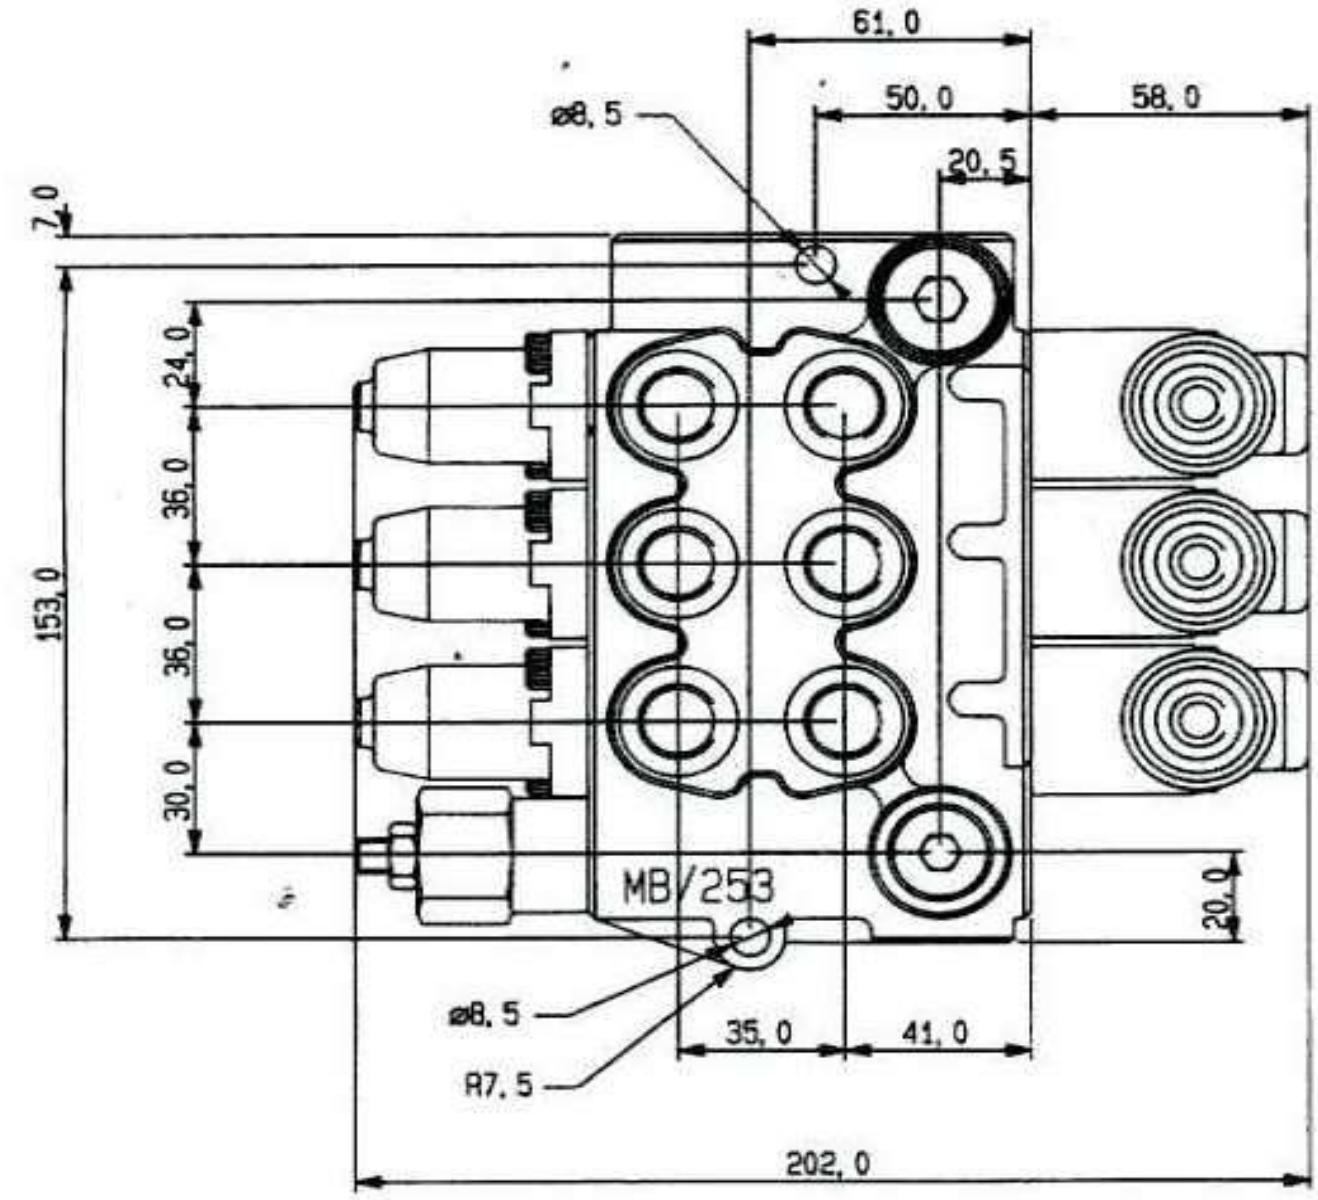





CONFIGURATION CONNECTIONS P-A-B-T MB/25

STANDARD THREADS BSP GAS

Attacco	Dimens.	Dimens Spec
P	3/8"	1/2"
P sup	3/8"	1/2"
A/B	3/8"	1/2"
T	1/2"	1/2"
T sup	1/2"	1/2"

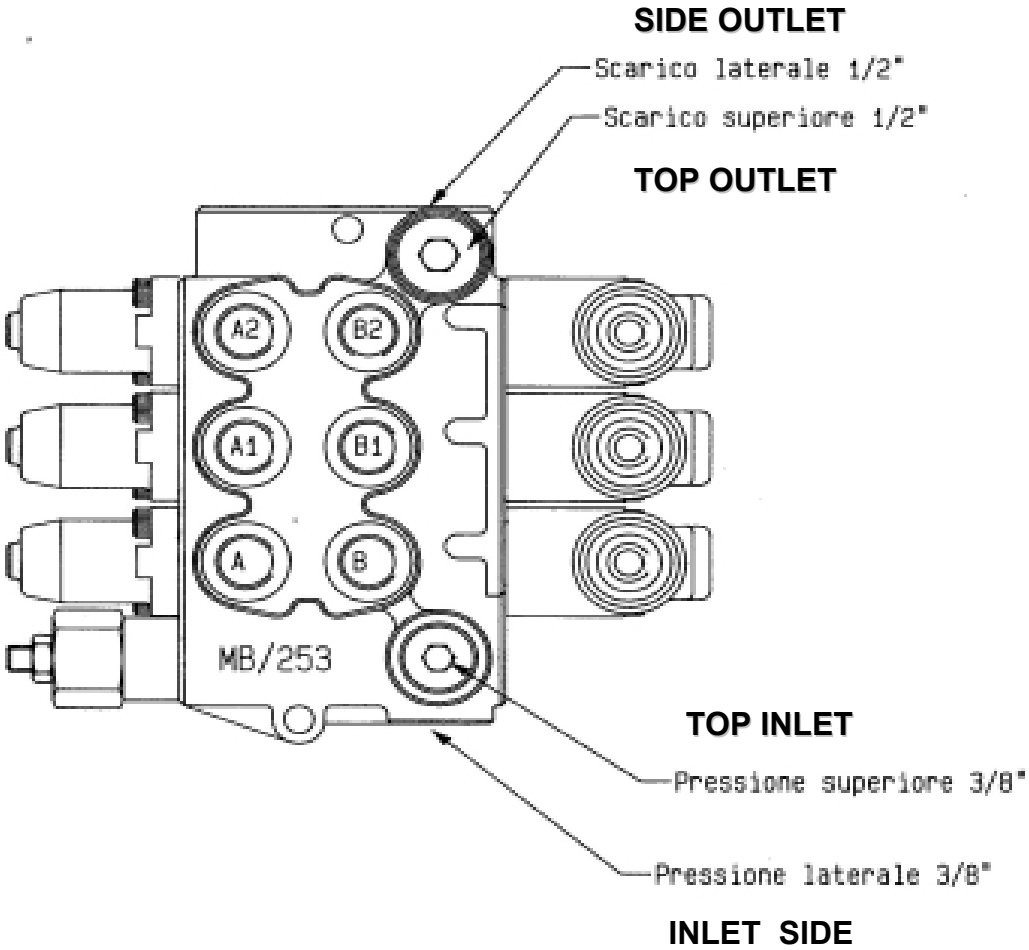


Posizionamento attacchi del fluido
Localization ports

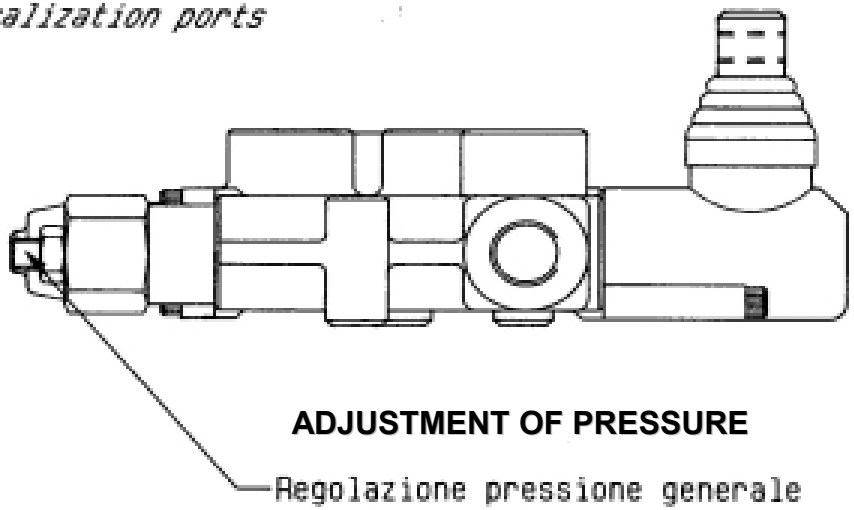

MB25/4 MONOBLOCK VALVES

MAX FLOW	45 LIT/MIN
MAX PRESSURE	350 BAR
BACK PRESSURE	180 BAR
LEAKAGE TO 100 BAR	1CC/MIN
WEIGHT	KG. 6
CONFIGURATION	PARALLEL


STANDARD CONFIGURATION

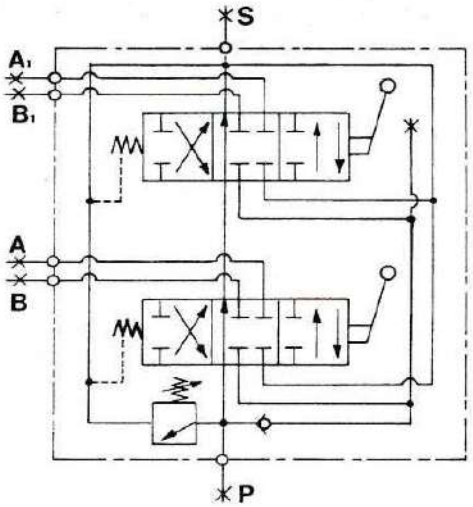




STANDARD THREADS BSP GAS

Attacco	Dimens.	Dimens Spec
P	3/8"	1/2"
P sup	3/8"	1/2"
A/B	3/8"	1/2"
T	1/2"	1/2"
T sup	1/2"	1/2"

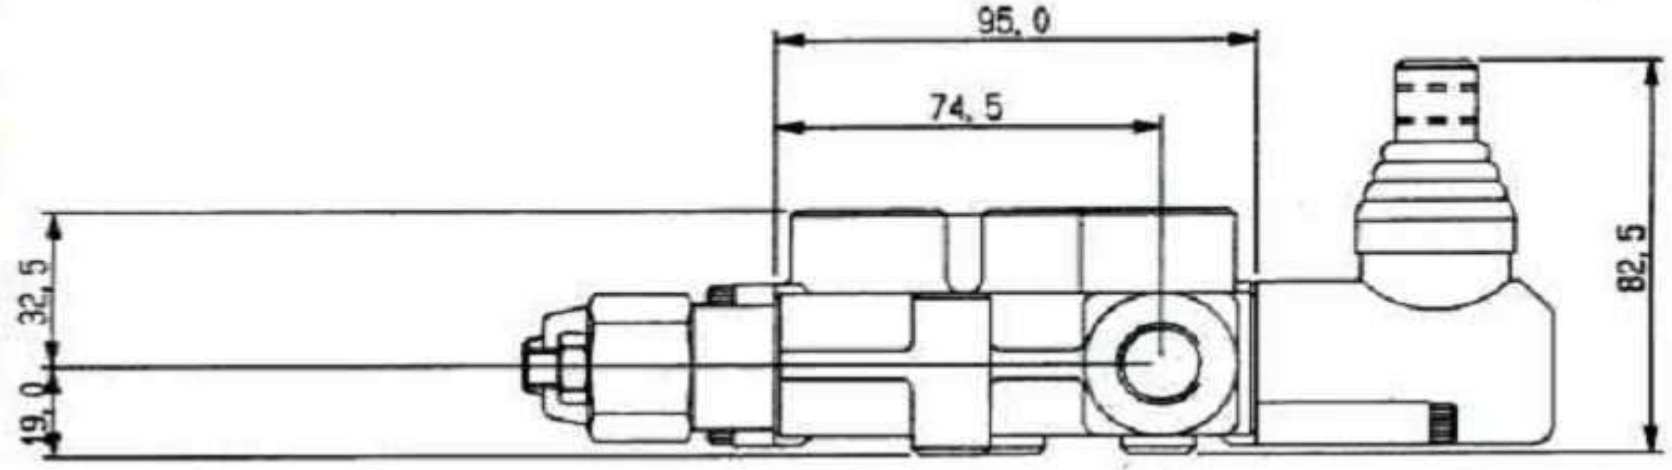

MB25/4 MONOBLOCK VALVES

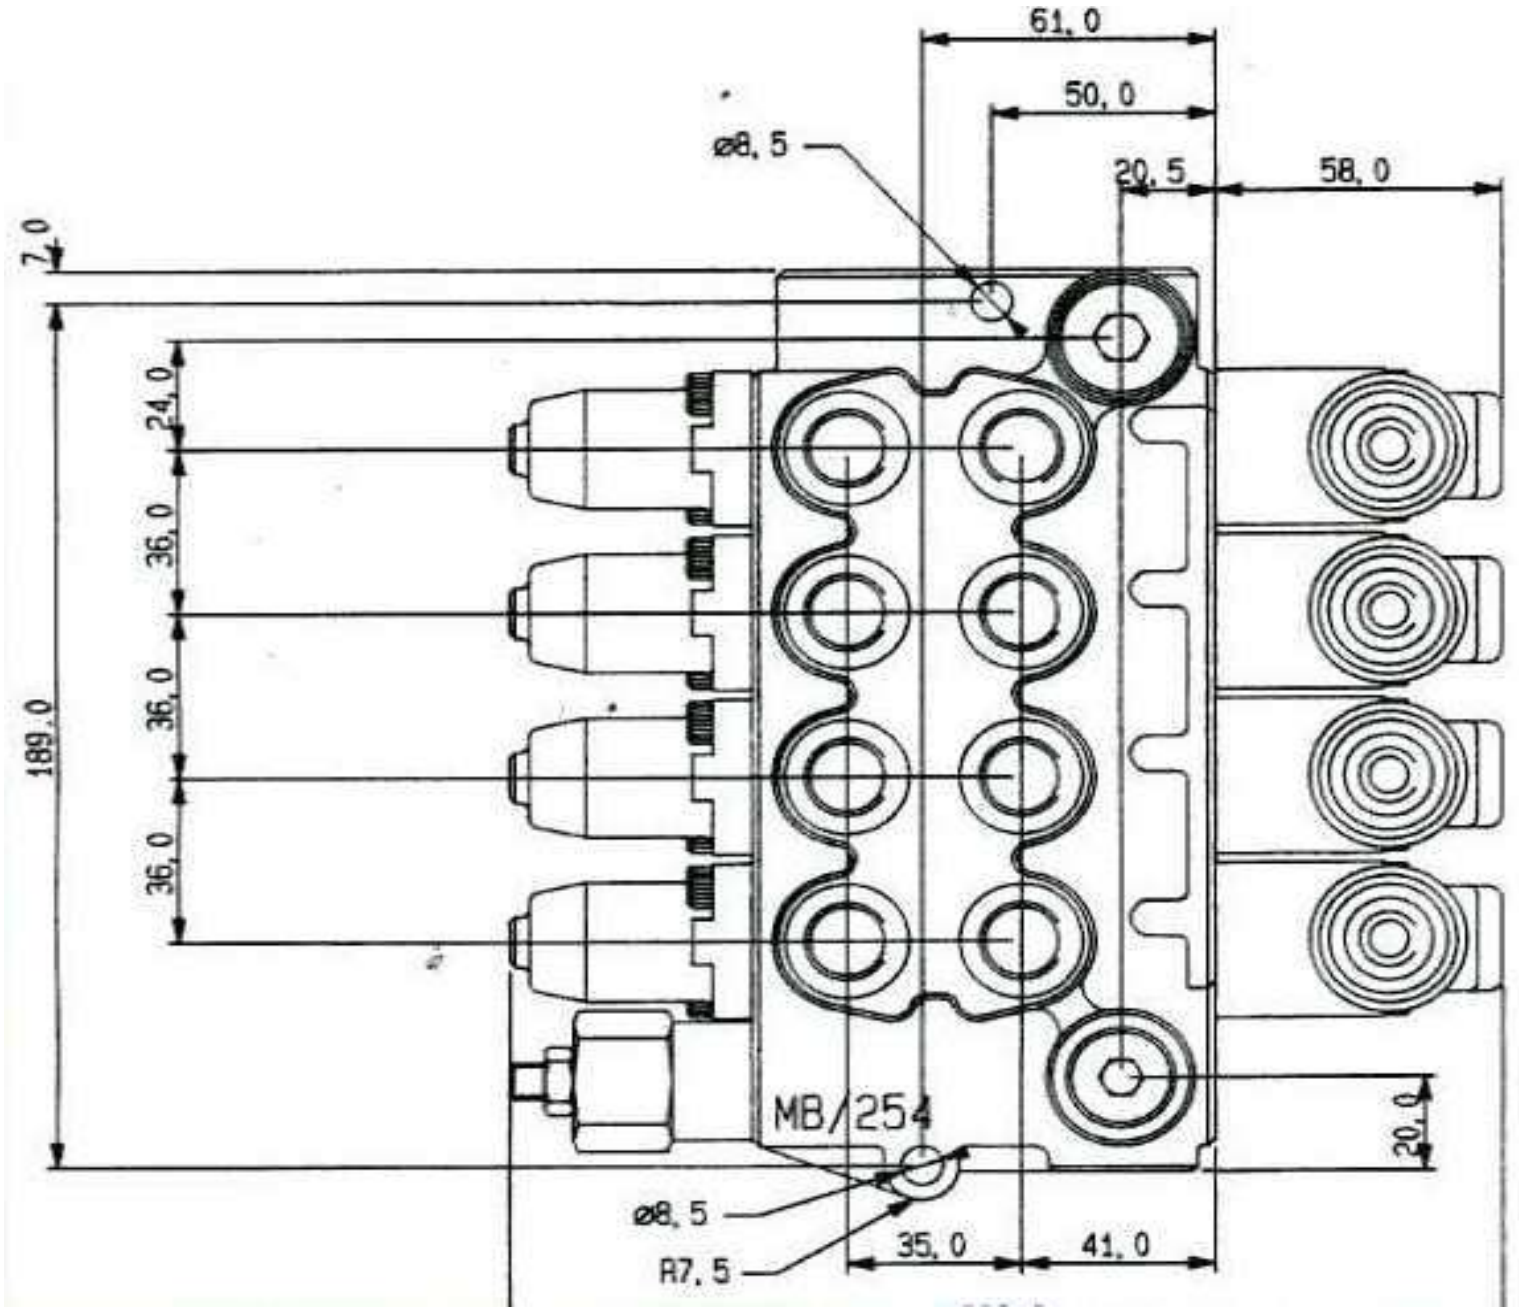




MB25/5 MONOBLOCK VALVES


MAX FLOW	45 LIT/MIN
MAX PRESSURE	350 BAR
BACK PRESSURE	180 BAR
LEAKAGE TO 100 BAR	1CC/MIN
WEIGHT	KG. 7.2
CONFIGURATION	PARALLEL

STANDARD CONFIGURATION

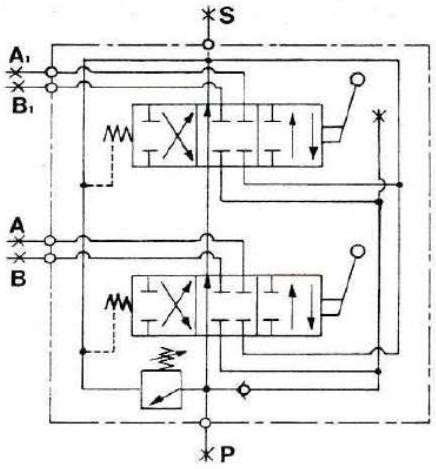




Attacco	Dimens.	Dimens Spec
P	3/8"	1/2"
P sup	3/8"	1/2"
A/B	3/8"	1/2"
T	1/2"	1/2"
T sup	1/2"	1/2"

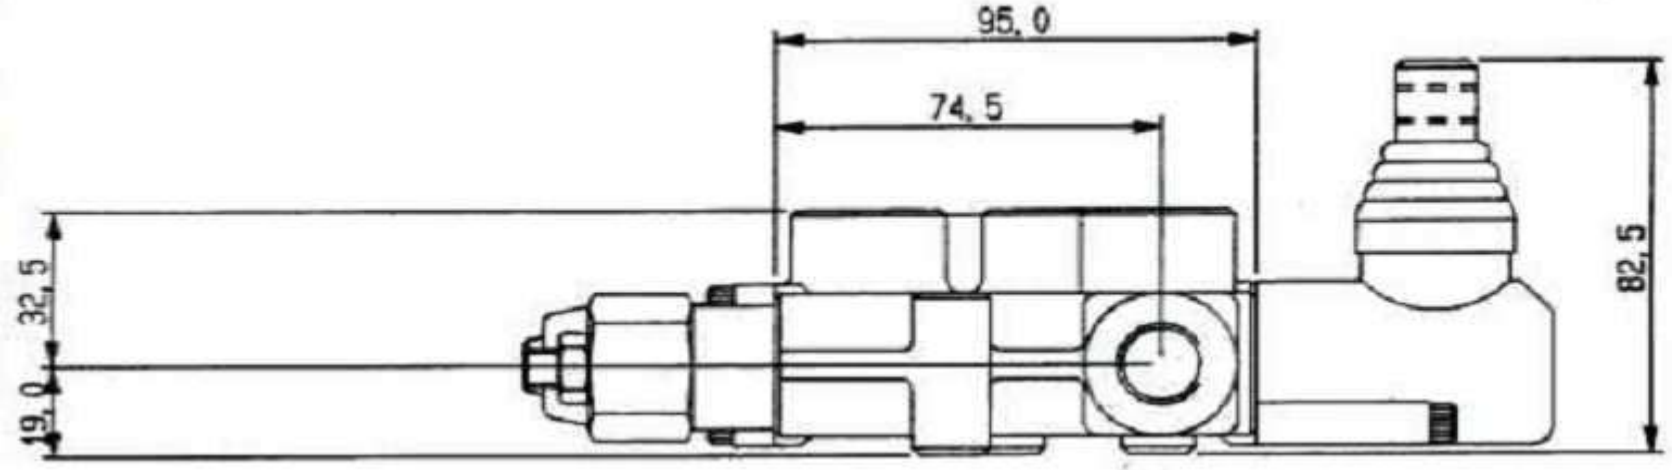

MB25/6 MONOBLOCK VALVES

MAX FLOW	45 LIT/MIN
MAX PRESSURE	350 BAR
BACK PRESSURE	180 BAR
LEAKAGE TO 100 BAR	1CC/MIN
WEIGHT	KG. 8.4
CONFIGURATION	PARALLEL


STANDARD CONFIGURATION

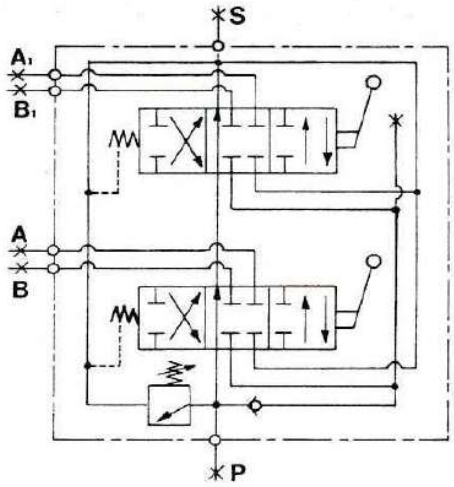




STANDARD THREADS BSP GAS

Attacco	Dimens.	Dimens Spec
P	3/8"	1/2"
P sup	3/8"	1/2"
A/B	3/8"	1/2"
T	1/2"	1/2"
T sup	1/2"	1/2"

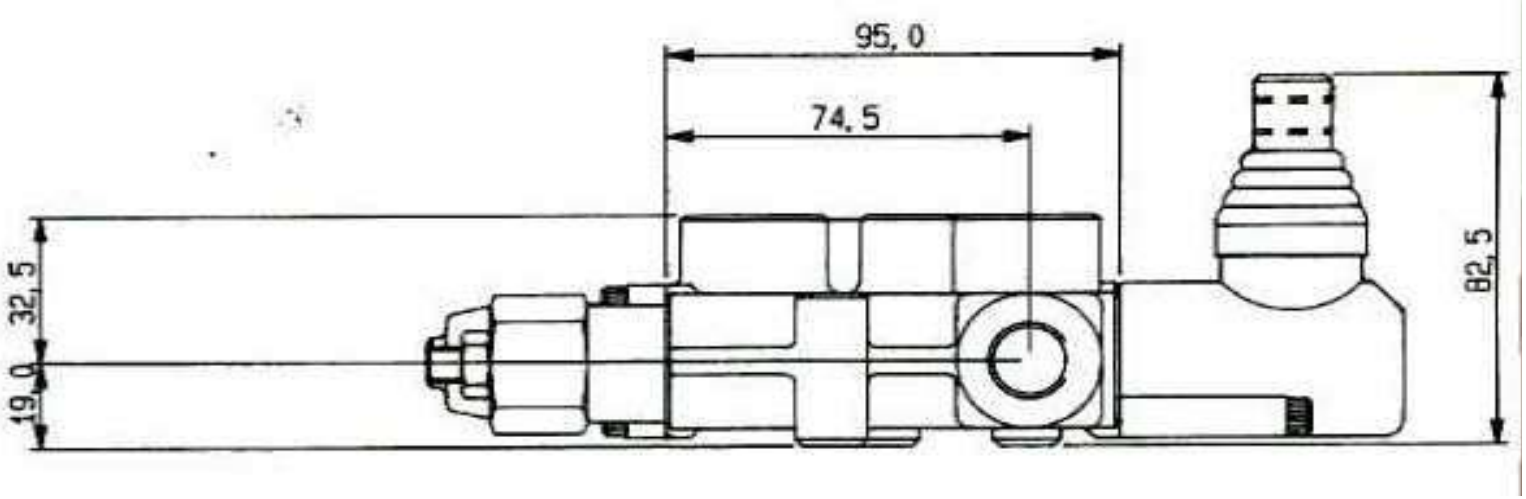


MB25/6 MONOBLOCK VALVES

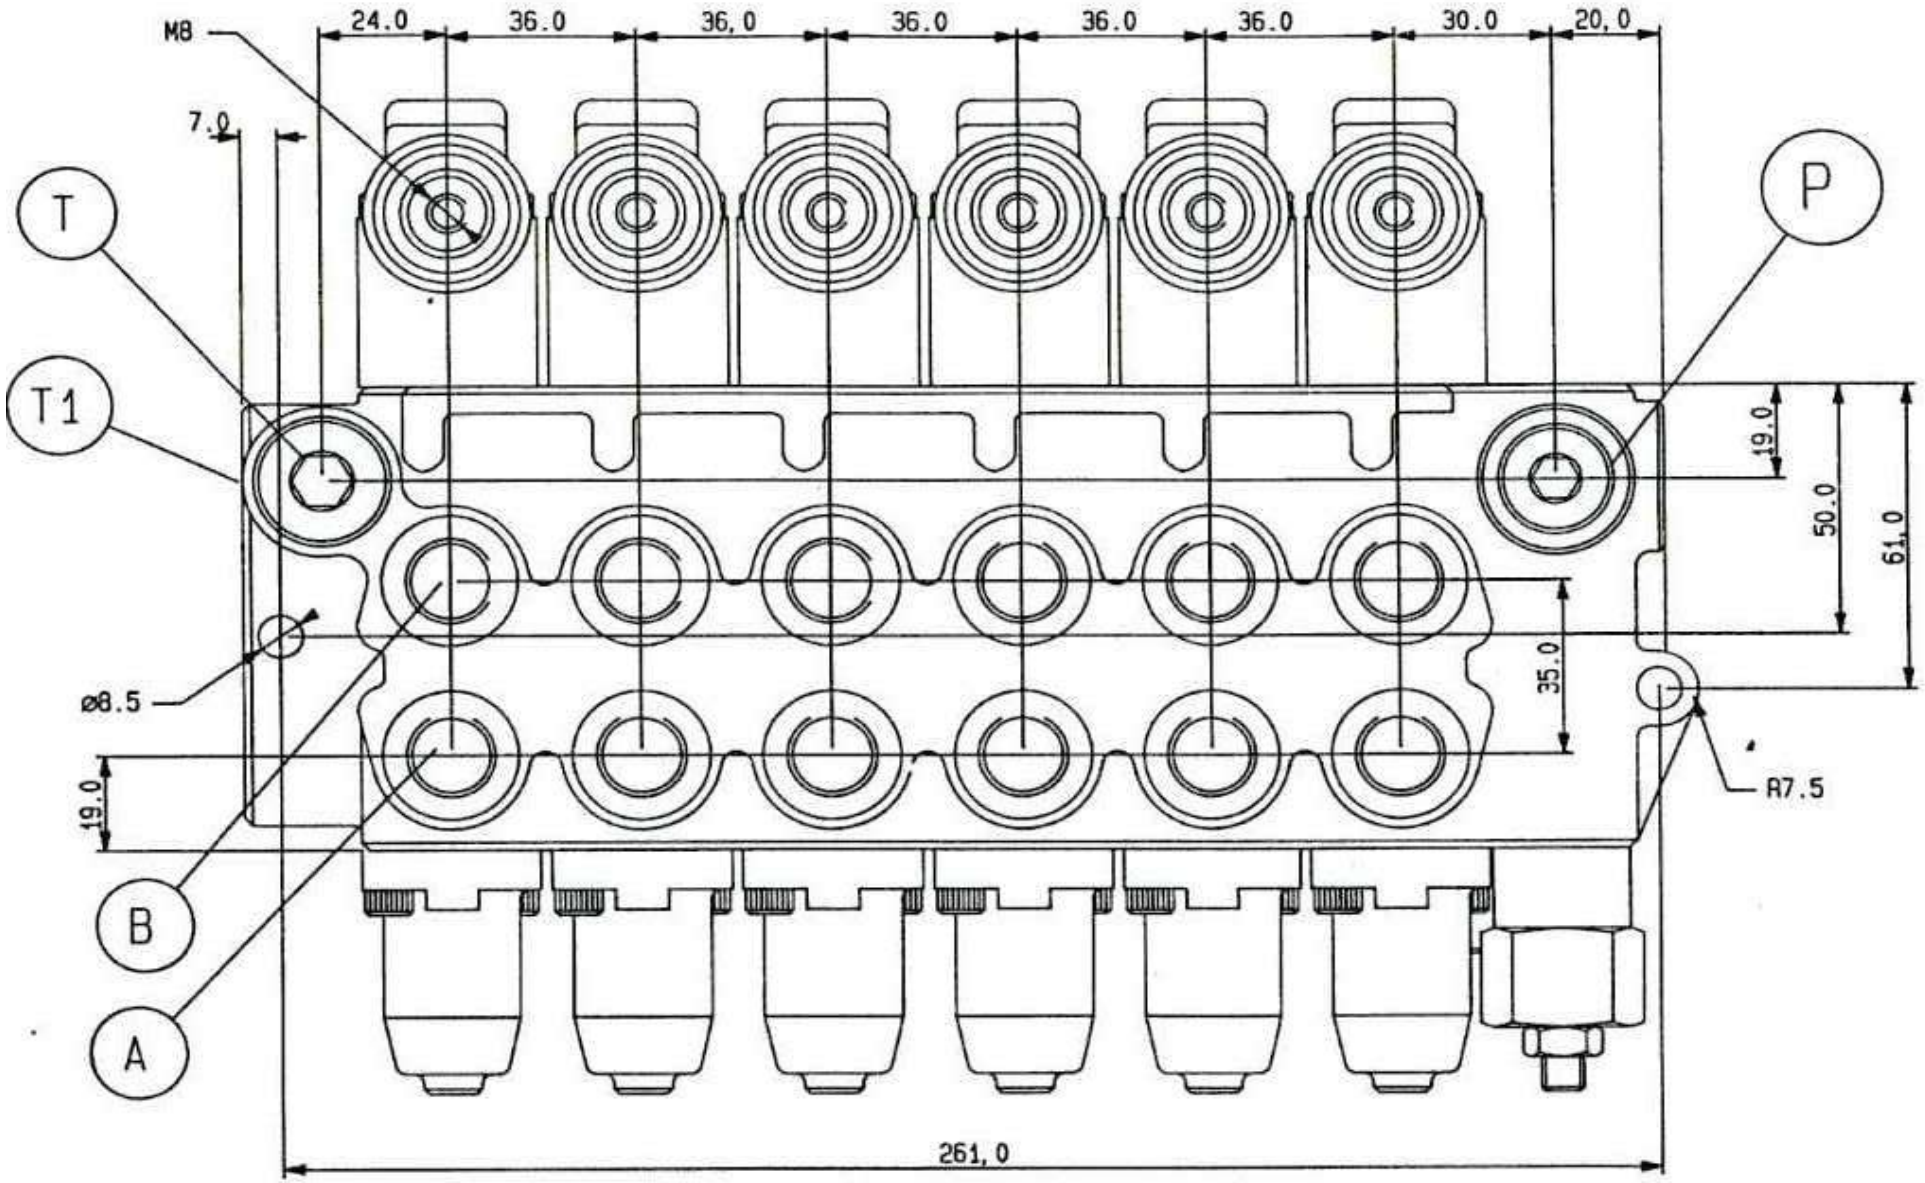


MB/35-1 MONOBLOCK VALVES

MAX FLOW	60 LIT/MIN
MAX PRESSURE	350 BAR
BACK PRESSURE	80 BAR
LEAKAGE TO 100 BAR	1CC/MIN
WEIGHT	KG. 3,4
CONFIGURATION	PARALLEL

STANDARD CONFIGURATION

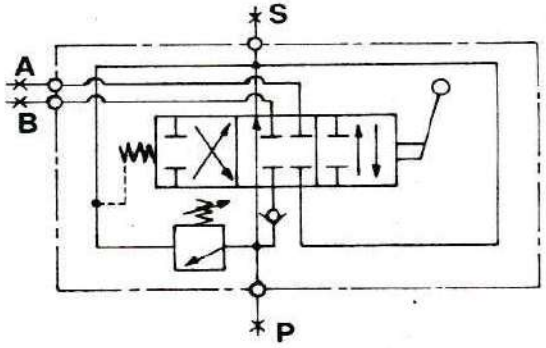



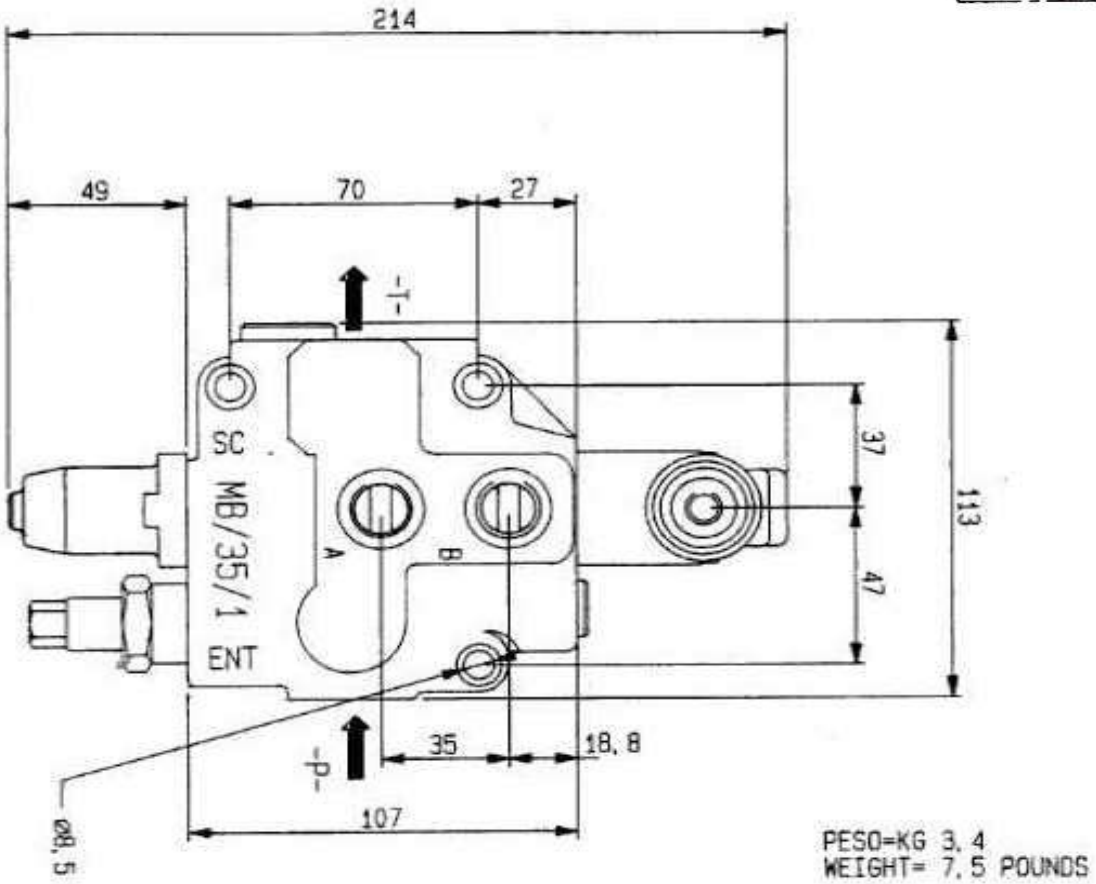


PESO=KG 3,4
WEIGHT= 7,5 POUNDS


STANDARD THREADS BSP GAS

Attacco	Dimens.	Dimens Spec
P	3/8"	1/2"
P sup	3/8"	1/2"
A/B	3/8"	1/2"
T	1/2"	1/2"
T sup	1/2"	1/2"


MB/35-2 MONOBLOCK VALVES

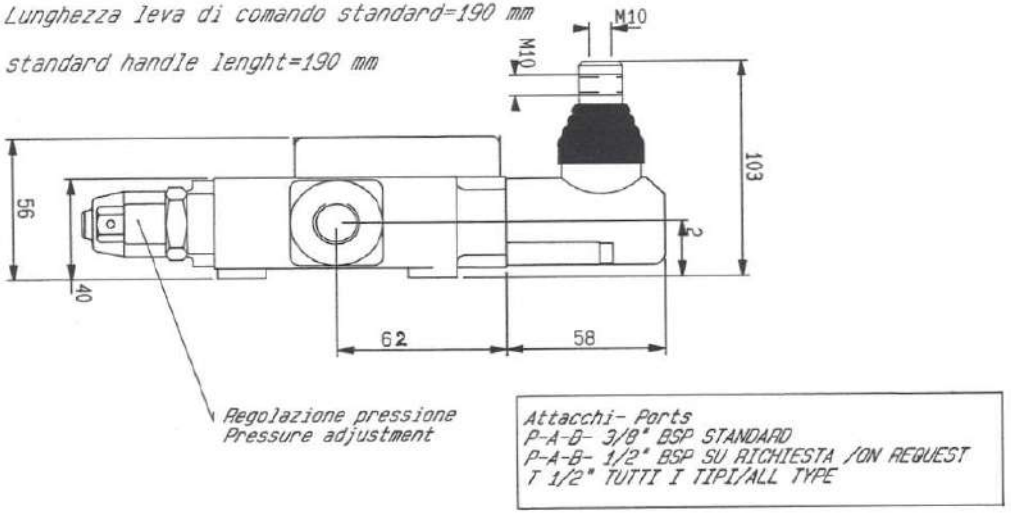

STANDARD CONFIGURATION

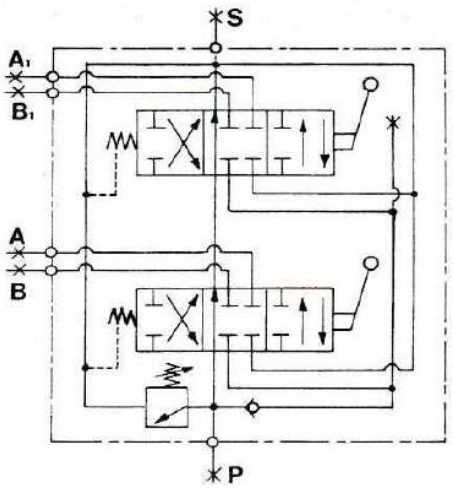



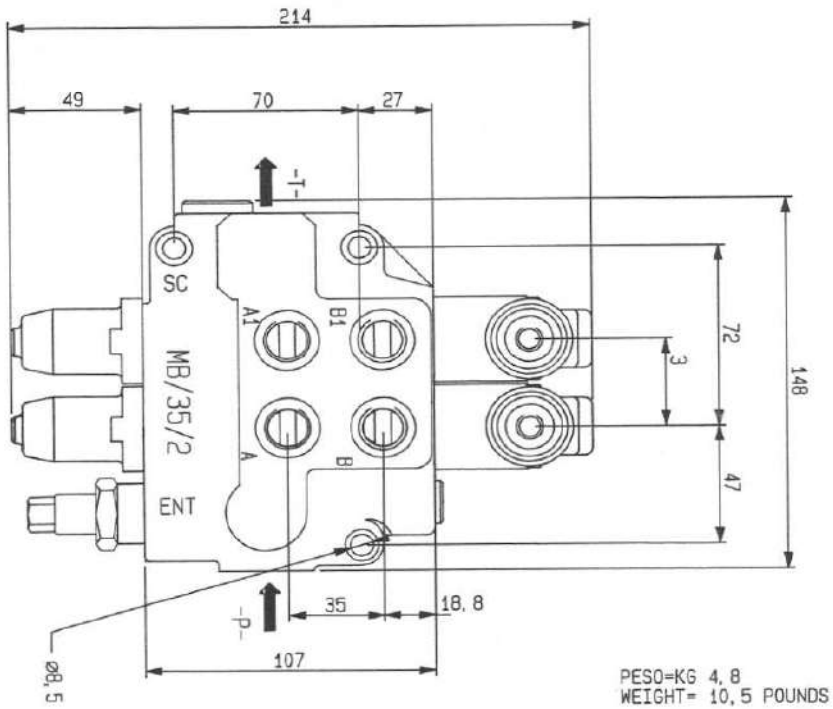


STANDARD THREADS BSP GAS


Attacco	Dimens.	Dimens Spec
P	3/8"	1/2"
P sup	3/8"	1/2"
A/B	3/8"	1/2"
T	1/2"	1/2"
T sup	1/2"	1/2"

MB/35-3 MONOBLOCK VALVES


MAX FLOW	60 LIT/MIN
MAX PRESSURE	350 BAR
BACK PRESSURE	80 BAR
LEAKAGE TO 100 BAR	2CC/MIN
WEIGHT	KG. 6,4
CONFIGURATION	PARALLEL

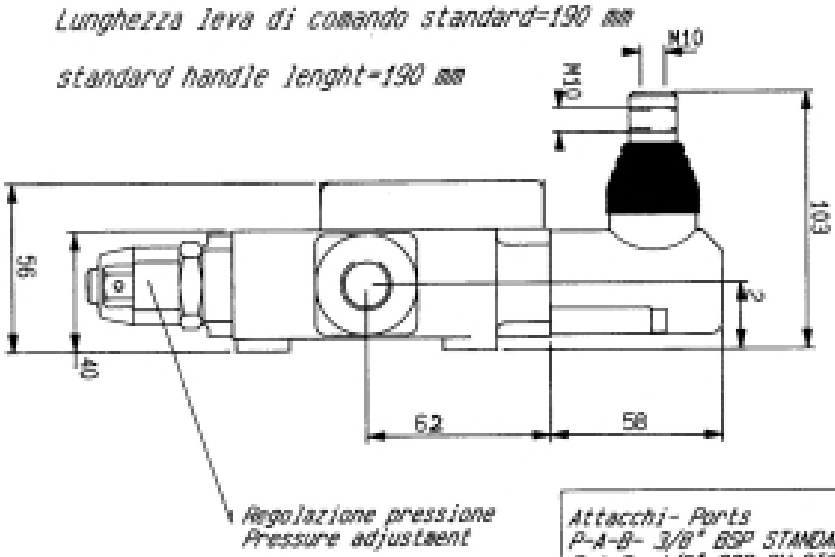


Attacchi- Ports
P-A-B- 3/8" BSP STANDARD
P-A-B- 1/2" BSP SU RICHIESTA /ON REQUEST
T 1/2" TUTTI I TIPI/ALL TYPE

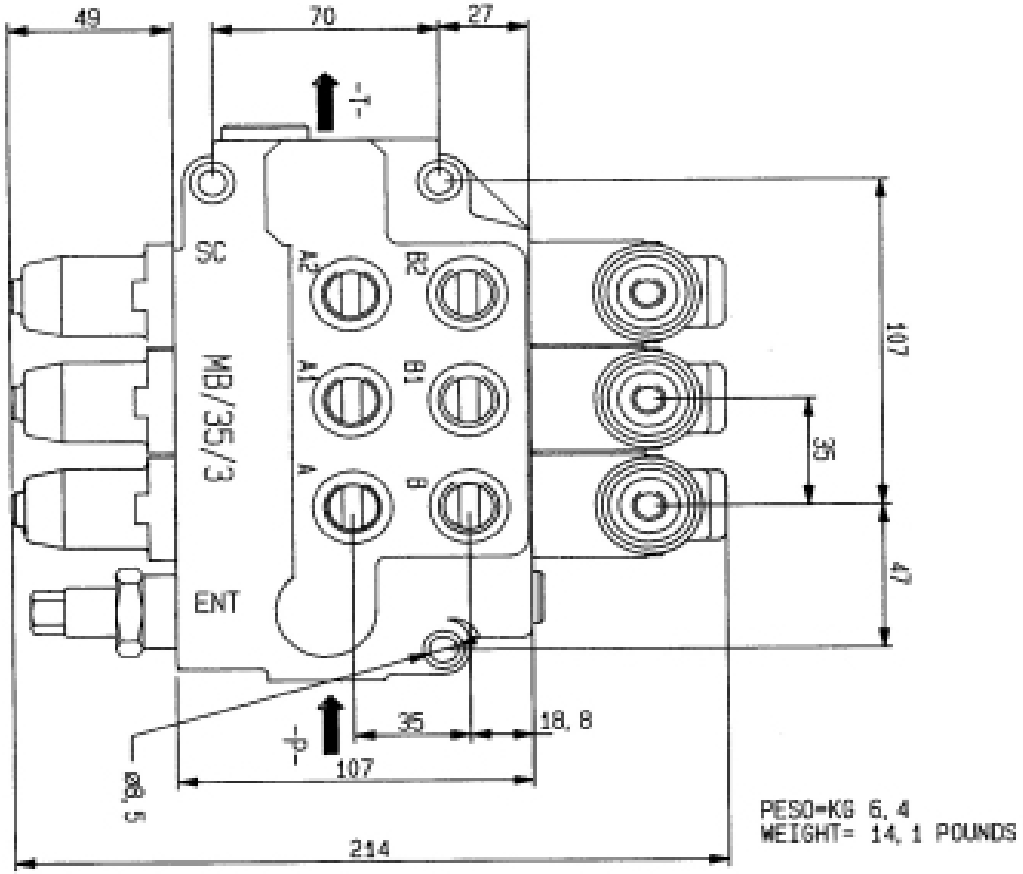

STANDARD CONFIGURATION

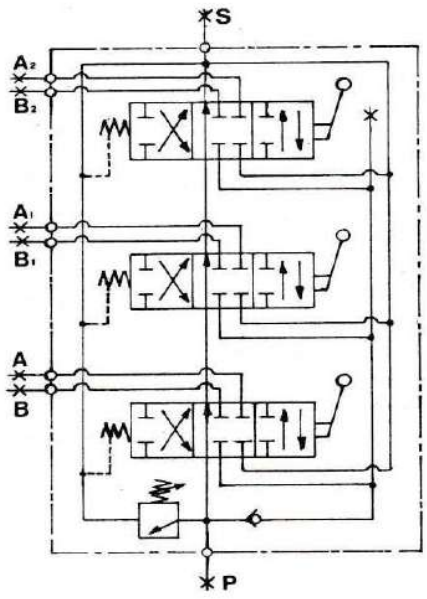


MB/35-4 MONOBLOCK VALVES

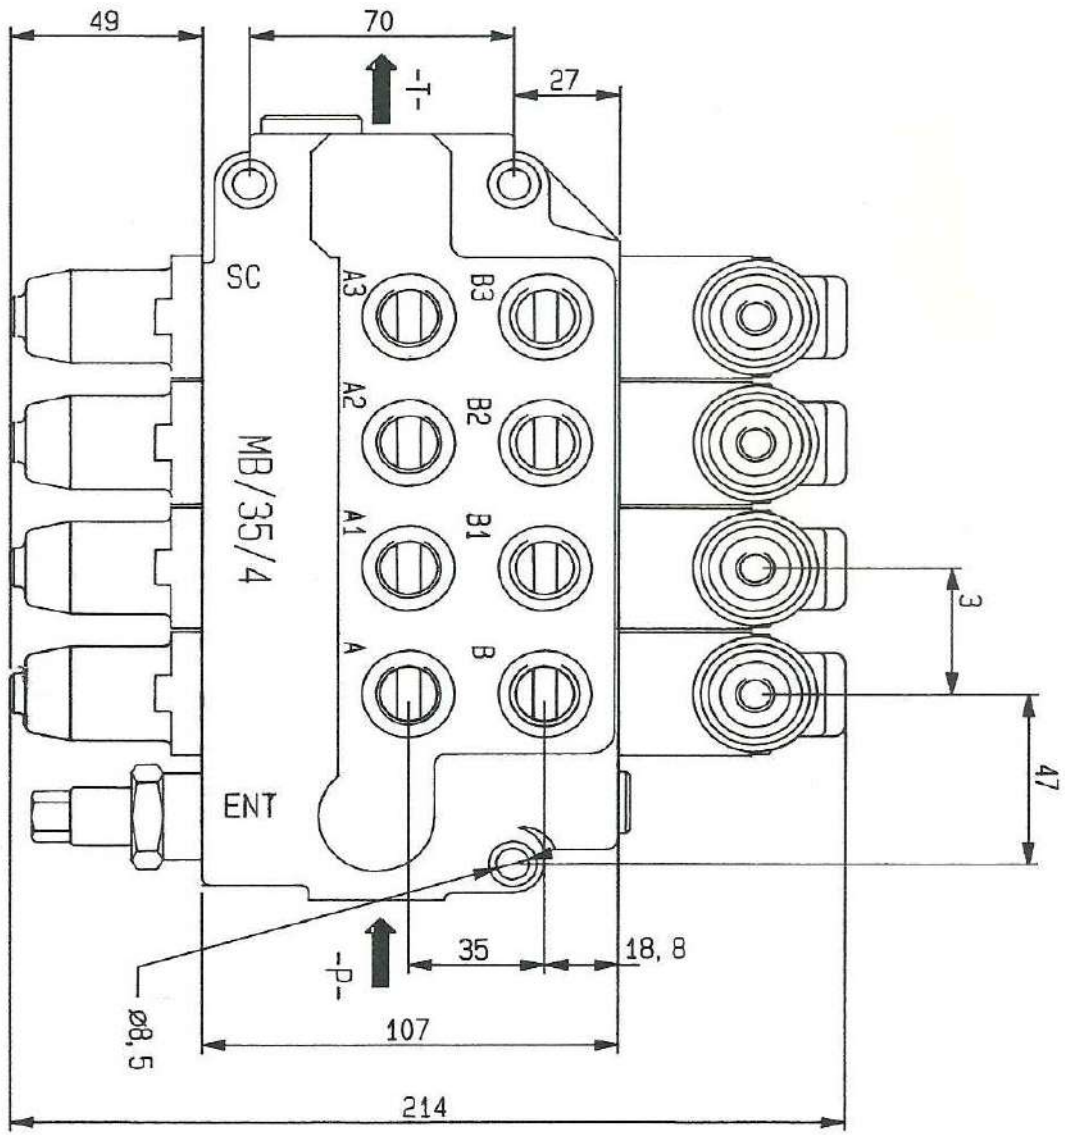

MAX FLOW	60 LIT/MIN
MAX PRESSURE	350 BAR
BACK PRESSURE	80 BAR
LEAKAGE TO 100 BAR	2CC/MIN
WEIGHT	KG. 7,8
CONFIGURATION	PARALLEL

Attacco	Dimens.	Dimens Spec
P	3/8"	1/2"
P sup	3/8"	1/2"
A/B	3/8"	1/2"
T	1/2"	1/2"
T sup	1/2"	1/2"

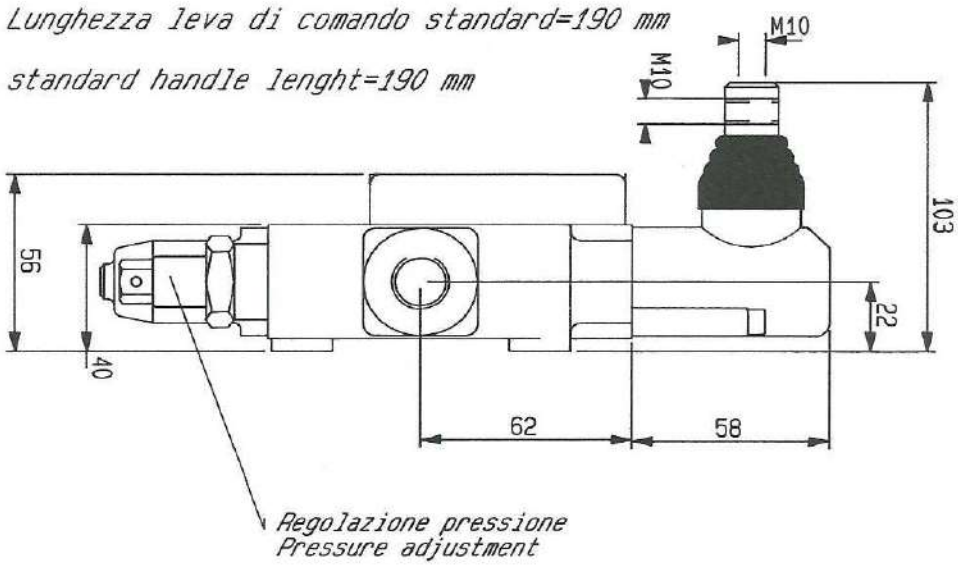


MB/60-1 MONOBLOCK VALVES


MAX FLOW	80 LIT/MIN
MAX PRESSURE	350 BAR
BACK PRESSURE	80 BAR
LEAKAGE TO 100 BAR	2CC/MIN
WEIGHT	KG. 6,4
CONFIGURATION	PARALLEL

ATTACCHI FILETTATI THREAD DIMENSIONS	
P-A-B	1/2'' BSP
S	3/4'' BSP

SCHEMA

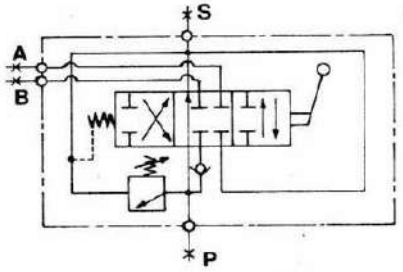



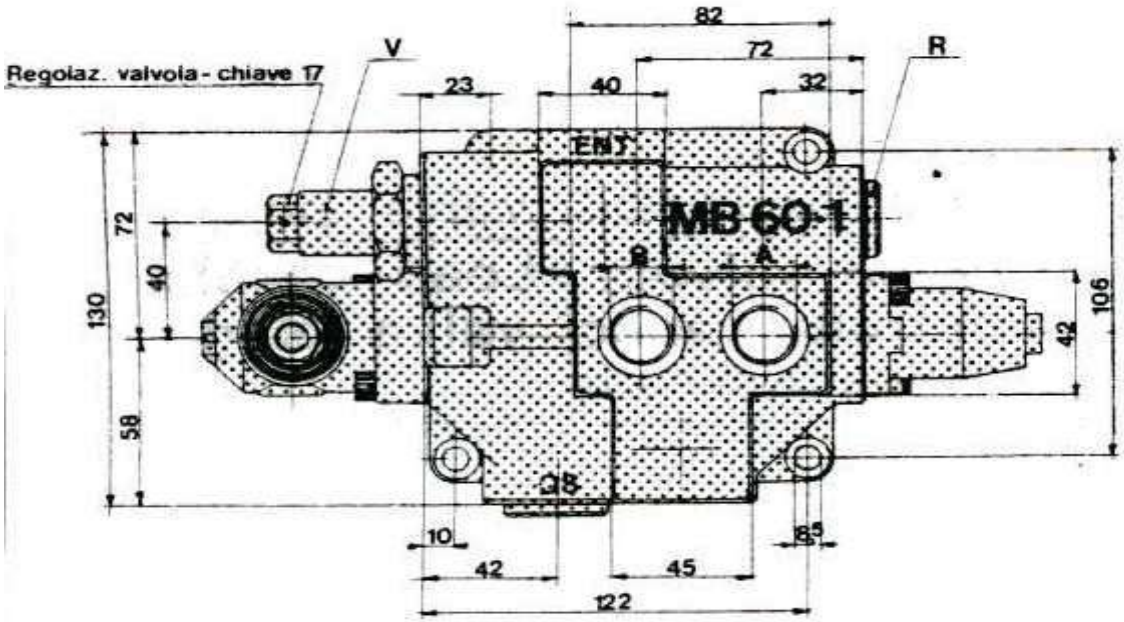


P	Pressione	Pressure - inlets
A-B	Utilizzi	Service ports
S	Scarico	Tank - exaust
V	Regolazione Press. massima	Relief valve adjustament
R	Tappo valvola controllo carico	Load - checks valve plug
Q	Tappo valvola controllo carico collegam. in serie	Load - checks valve plug

MB/60-2 MONOBLOCK VALVES


MAX FLOW	80 LIT/MIN
MAX PRESSURE	350 BAR
BACK PRESSURE	80 BAR
LEAKAGE TO 100 BAR	2CC/MIN
WEIGHT	KG. 9,3
CONFIGURATION	PARALLEL

ATTACCHI FILETTATI THREAD DIMENSIONS	
P-A-B	1/2'' BSP
S	3/4'' BSP

SCHEMA

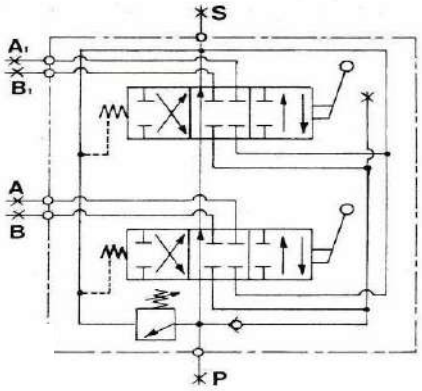



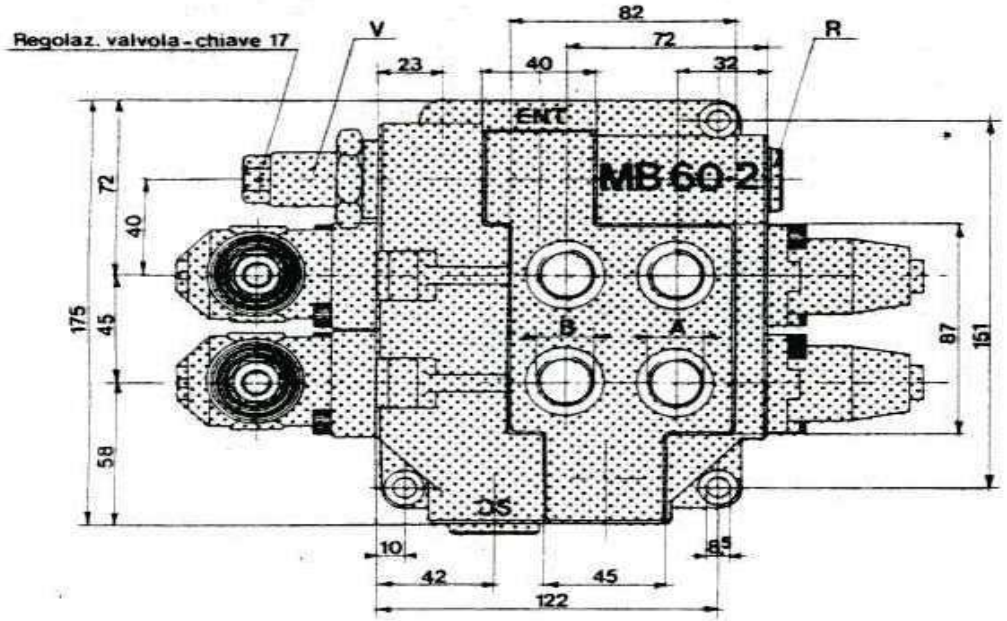


P	Pressione	Pressure - inlets
A-B	Utilizzi	Service ports
S	Scarico	Tank - exaust
V	Regolazione Press. massima	Relief valve adjustament
R	Tappo valvola controllo carico	Load - checks valve plug
Q	Tappo valvola controllo carico collegam. in serie	Load - checks valve plug


MB/60-3 MONOBLOCK VALVES


MAX FLOW	80 LIT/MIN
MAX PRESSURE	350 BAR
BACK PRESSURE	80 BAR
LEAKAGE TO 100 BAR	2CC/MIN
WEIGHT	KG. 12,2
CONFIGURATION	PARALLEL

ATTACCHI FILETTATI THREAD DIMENSIONS	
P-A-B	1/2'' BSP
S	3/4'' BSP

SCHEMA

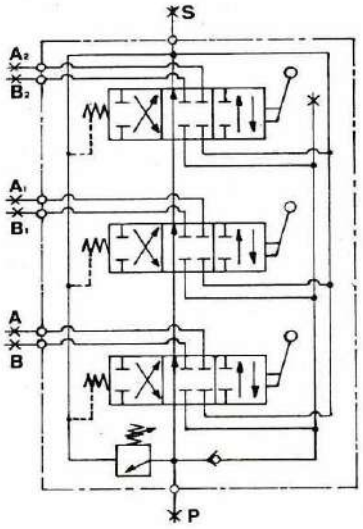

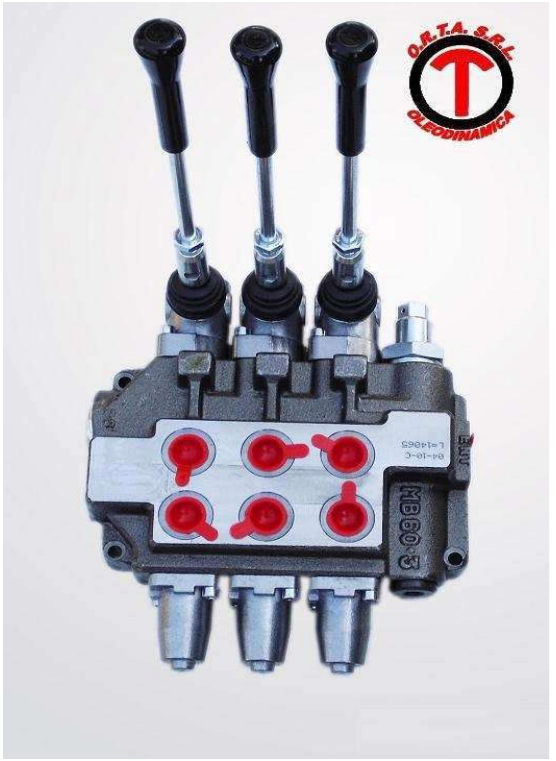

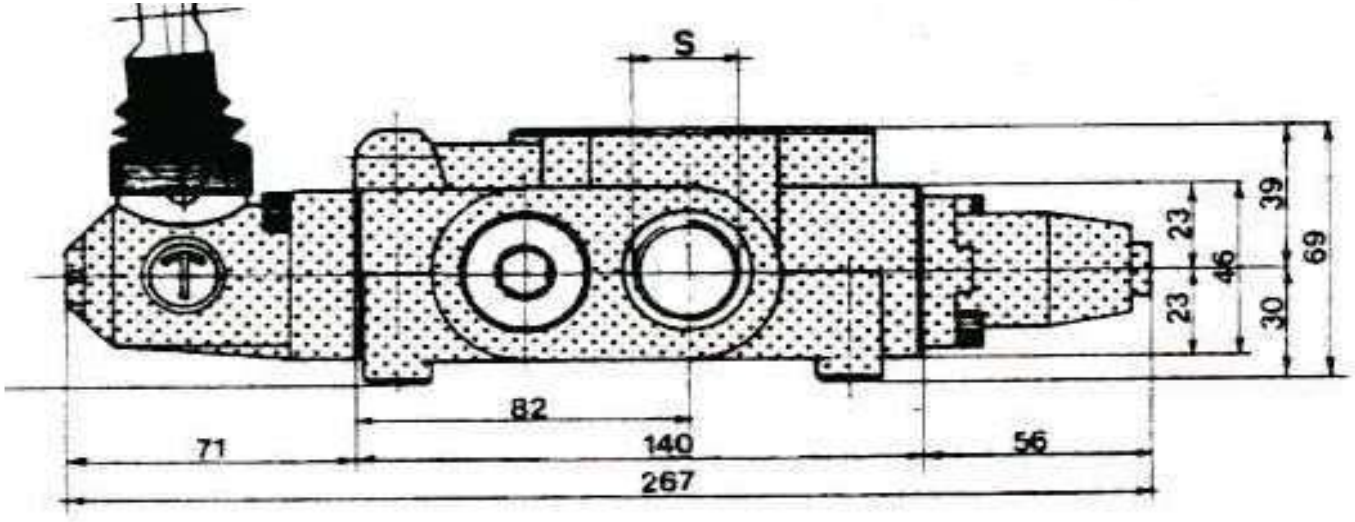

P	Pressione	Pressure - inlets
A-B	Utilizzi	Service ports
S	Scarico	Tank - exaust
V	Regolazione Press. massima	Relief valve adjustament
R	Tappo valvola controllo carico	Load - checks valve plug
Q	Tappo valvola controllo carico collegam. in serie	Load - checks valve plug

MB/60-3 MONOBLOCK VALVES

