

P SERIES

ISO A push / pull female couplings (Connects with 1/2" ISO A male probes)

INTRODUCTION

Holmbury's P Series ISO A female couplings are designed primarily for the agricultural industries and incorporate a push-pull design. The coupling is panel mounted using circlip grooves in the locking sleeve.

CONSTRUCTION

- Carbon steel with trivalent plating
- Fitted with Nitrile seals
- Also available in connect under pressure variant (See IAPC Series)

FEATURES

- Can be connected with standard ISO A 1/2" male couplings
- Release mechanism protects coupling and hose from damage in event of accidental separating force
- Locking ball system allows quick connection
- Bidirectional flow

ACCESSORIES

- Dust Caps and Plugs are available for the P Series




SPECIFICATIONS

- Operating temperatures (with Nitrile seals): -40°C (-40°F) to 106°C (223°F)


APPLICATIONS

- Agricultural
- Mobile
- Construction


ORDER CODES

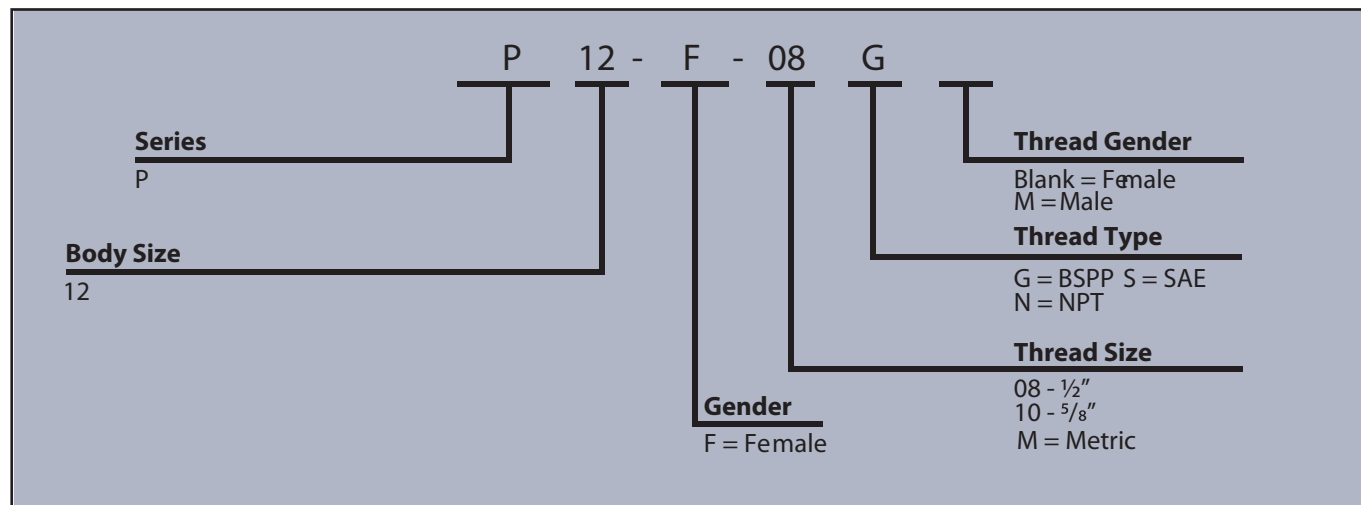

DRAWING

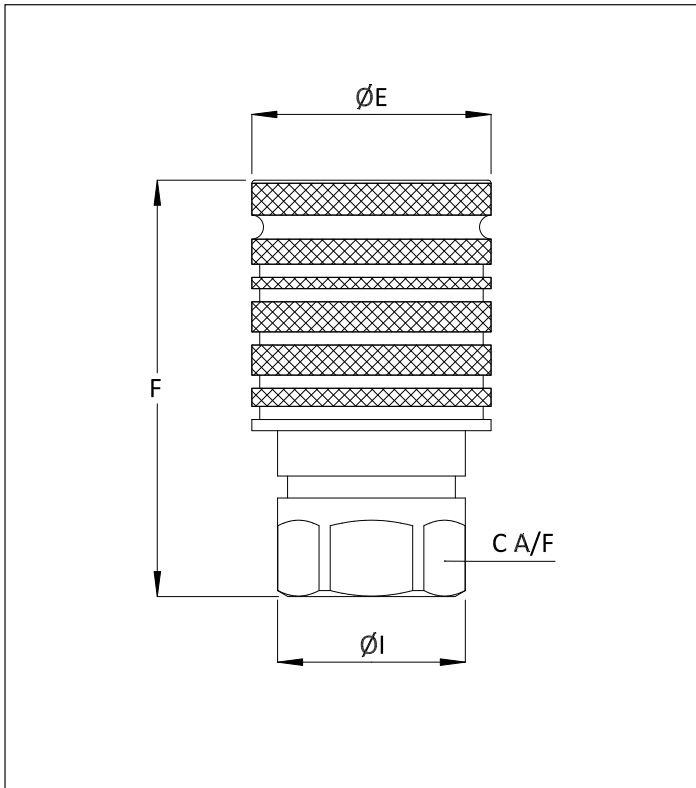

PRESSURE DROP CHARACTERISTICS

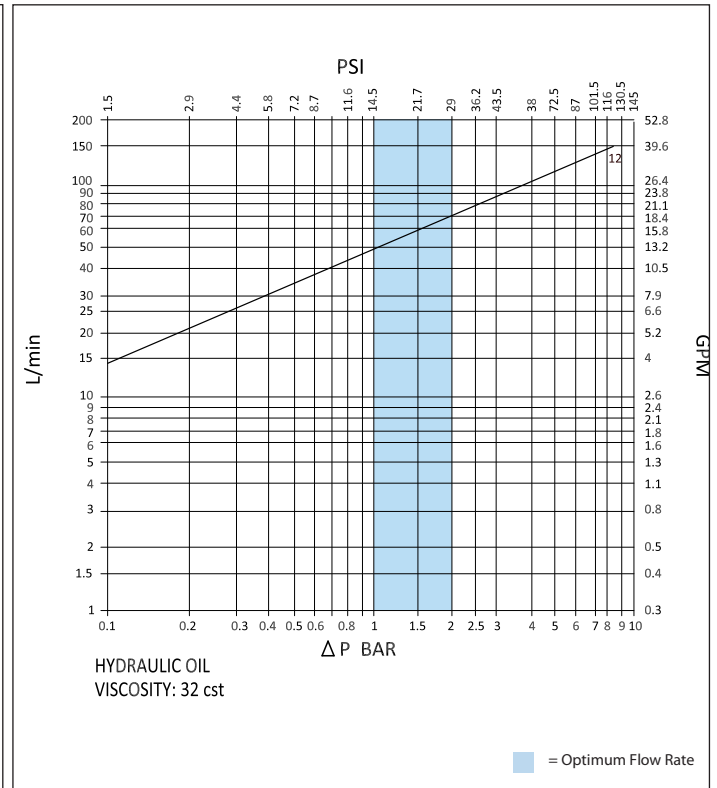

DIMENSIONS

Size	Thread Size (A)	C	F	$\varnothing E$	$\varnothing H$	Maximum Working Pressure	Burst Pressure (Coupled)	Burst Pressure (Male)	Burst Pressure (Female)
		Dimensions in mm				Bar			
		Dimensions in Inches				Psi			
P 12	1/2"	27.0	38.5	66.5	30.0	320	1500	1500	1400
		1.1	1.5	2.6	1.2	4640	21750	21750	20300

PSI= Bar x14.5 Inches= mm/25.4

