TECHNICAL SHEET

GR1 - TAPERED SHAFT 1:8 - CLOCKWISE




Use axial gap automatic compensation mechanism.

High sustained working pressure and long service life.

Anti fouling ability is strong and suitable for power units, machines and other kinds of hydraulics systems.

INLET **OUTLET**

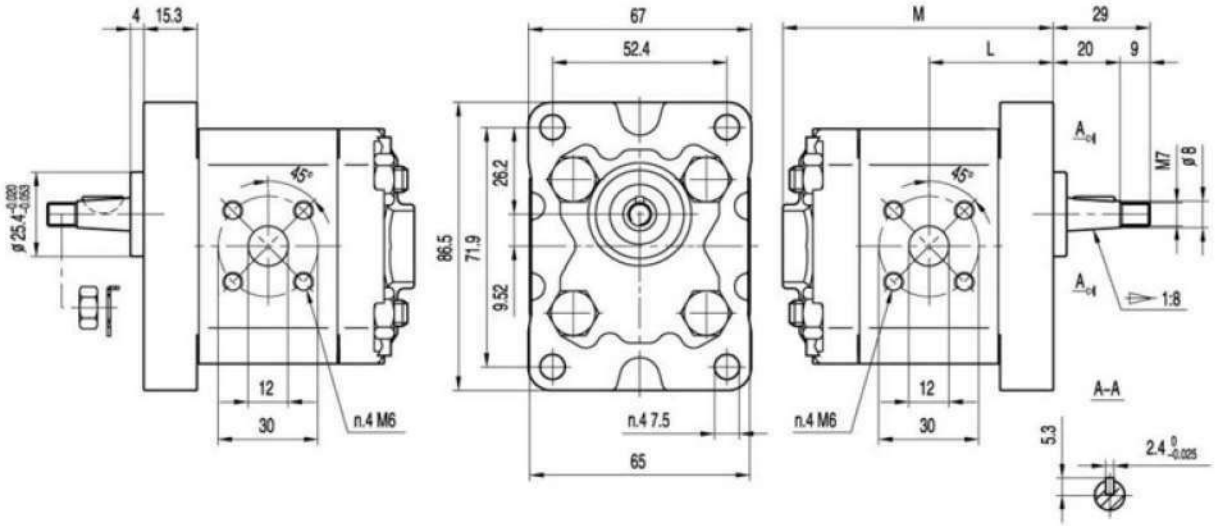

Part Number	Displacement	Max. Pressure			Max. Speed	Min. Speed	Dimensions	
		P1	P2	P3			L	M
1C1.1	1.1	230	250	270	6000	1000	33	74
1C1.6	1.6	230	250	270	6000	800	34	76

TECHNICAL SHEET

GR1 - TAPERED SHAFT 1:8 - CLOCKWISE




Use axial gap automatic compensation mechanism.

High sustained working pressure and long service life.


Anti fouling ability is strong and suitable for power units, machines and other kinds of hydraulics systems.

INLET **OUTLET**

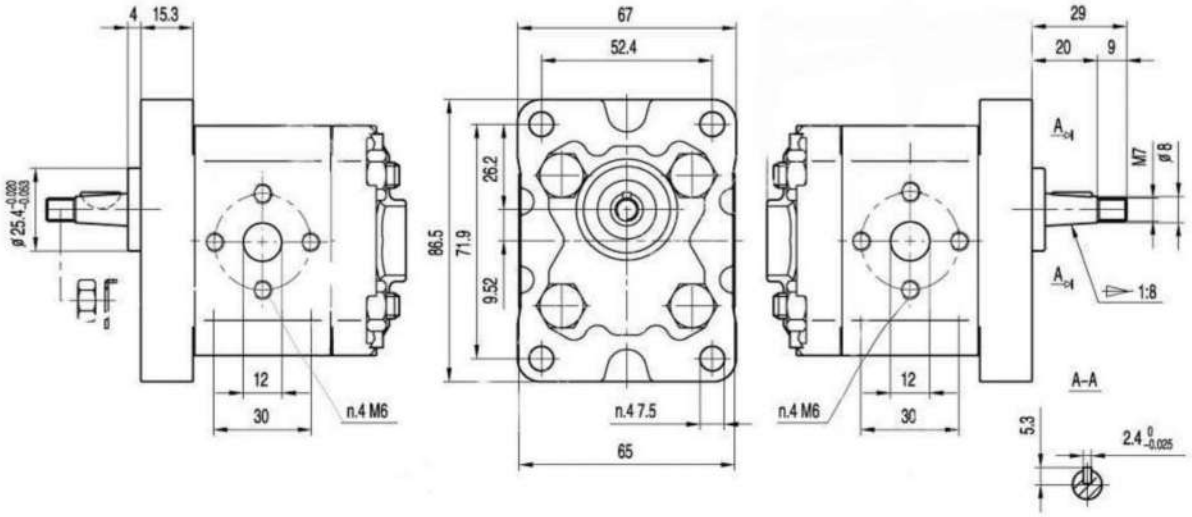


Part Number	Displacement	Max. Pressure			Max. Speed	Min. Speed	Dimensions	
		P1	P2	P3			L	M
1C2.5	2.5	230	250	270	6000	800	36	80
1C3.2	3.2	210	230	250	5000	800	37	82
1C4.2	4.2	210	230	250	4000	800	39	86
1C4.8	4.8	190	210	230	3500	600	40	88
1C5.8	5.8	190	210	230	3000	600	42	92
1C8.0	8.0	160	180	200	2100	600	46	100

GR1 - TAPERED SHAFT 1:8 - CLOCKWISE



F1

TYPE	INLET			OUTLET		
0.8 to 1.8	A	B	C	a	b	c
	30	12	M6	30	12	M6



F40

TYPE	INLET			OUTLET		
2.1 to 8.0	A	B	C	a	b	c
	30	12	M6	30	12	M6